

DH-PFM800

Passive HDCVI Balun




Specifications

Model	DH-PFM800		
Properties			
Transmission Signal	1 channel		
Transmission Distance	720P: 400M (max) 1080P: 250M (max)		
Category Type	UTP CAT5/5E/6 (R<10 Ω /100M)		
Video Transmission Properties And Port			
Coaxial Video Connector	BNC-M		
Twisted-pair Video Connector	Push-terminal		
Compatible Format	HDCVI		
Resolution	720P/1080P		
Anti-interference	>60db		
Protection			
ESD	1a contact discharge electricity level 3		
	1b air discharge electricity level 3		
	Per:IEC61000-4-2		
Coaxial Cable Connector	2KV(common-code) Per:IEC1000-4-5		
UTP Cable Connector	2KV(different-code),4KV(common-code),Per:IEC1000-4-5		
Impedance			
BNC Male	75 ohms		
UTP Cable	100 ohms		
Physical Properties			
Dimension(L*W*H)	53mm*20mm*17mm		


DH-PFM800

Shell	ABS
Color	Black
N.W.	25G
Stability	
MTBF	>10000H
Environmental	
Operating Temperature	-10~55℃
Storage Temperature	-20~70℃
Humidity	0~95%(non-condensing)

Dimensions (mm)

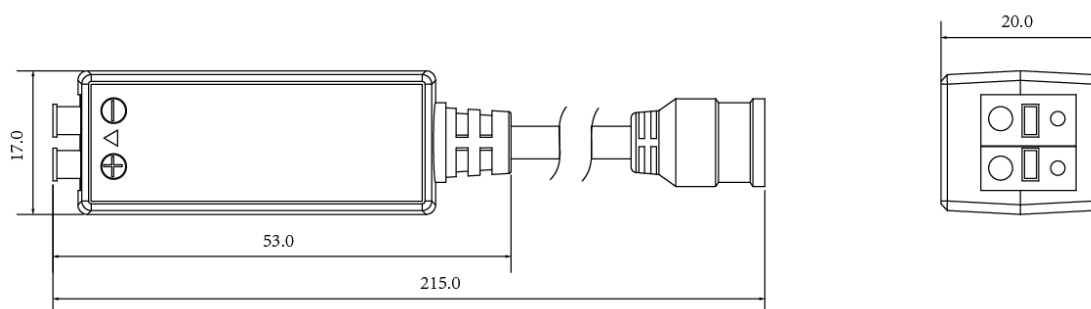

Application

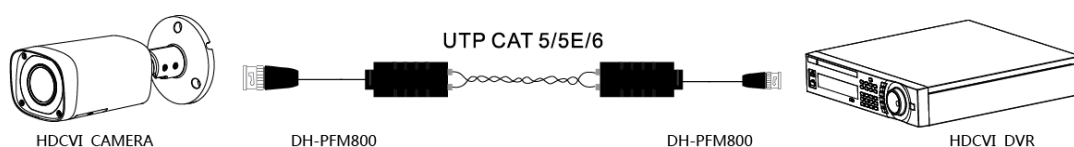

Dahua Technology USA Inc.

23 Hubble, Irvine Spectrum, CA92618, USA

Tel: +001-949 679 7777

Fax: +001-949 679 5760

Email: support.usa@dahuatech.com

www.dahuatech.us

*Design and specifications are subject to change without notice.

© 2014 Dahua Technology