



RFID Transponder


IQC21-12.4 10pcs

- Operating frequency 13.56 MHz
- Conforms to ISO 15693
- 64 bit Fixcode
- 896 bits memory available
- Degree of protection IP67
- Packaging unit: 10 pieces

Data carrier



Dimensions

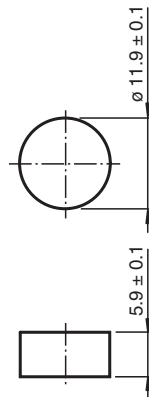

Technical Data

General specifications

Operating frequency	13.56 MHz
Transfer rate	26 kBit/s

Memory

Chip Type	I-CODE SLIX (NXP)
EEPROM	896 Bit
UID	64 Bit
Memory organization	4 bytes/block
Read cycles	unlimited
Write cycles	100000
Data retention period	50 years

Directive conformity

Radio equipment	
Directive 2014/53/EU	EN 300330
RoHS	
Directive 2011/65/EU (RoHS)	IEC/EN 63000

Standard conformity

Release date: 2022-02-01 Date of issue: 2022-02-01 Filename: 263242_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**


Technical Data

Degree of protection	EN 60529
RFID	ISO/IEC 15693-1 ISO/IEC 15693-2 ISO/IEC 15693-3 ISO/IEC 18000-3
Ambient conditions	
Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Mechanical specifications	
Housing height	6 mm
Housing diameter	12.1 mm + 0.2 mm
Degree of protection	IP67
Material	
Housing	PBT
Encapsulation compound	CY 221/HY 2966
Installation	
In metal	yes
On metal	yes
In air	yes
Construction type	Cylindrical
Note	Packaging unit, 10-piece

Reading range in air IQC21-12.4

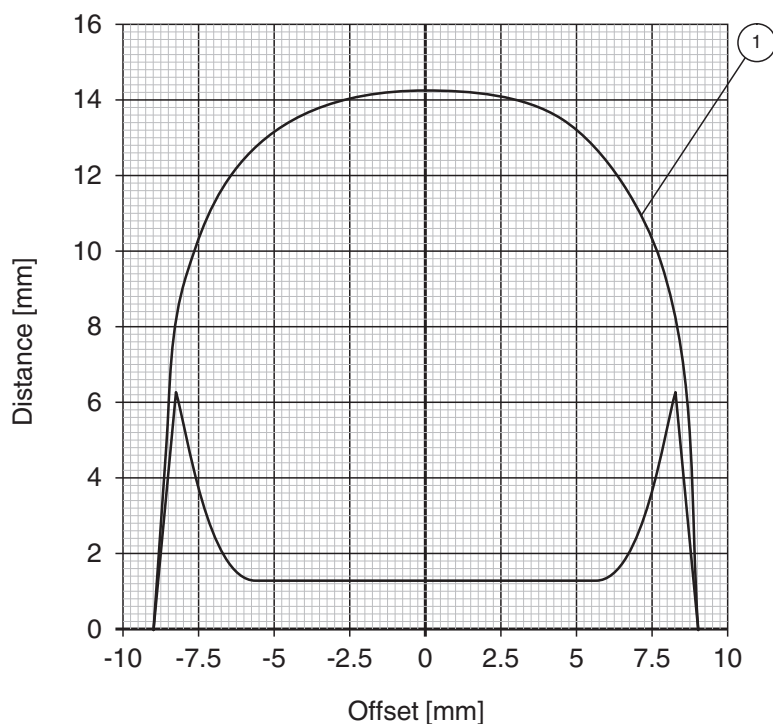


Reading range in aluminum IQC21-12.4

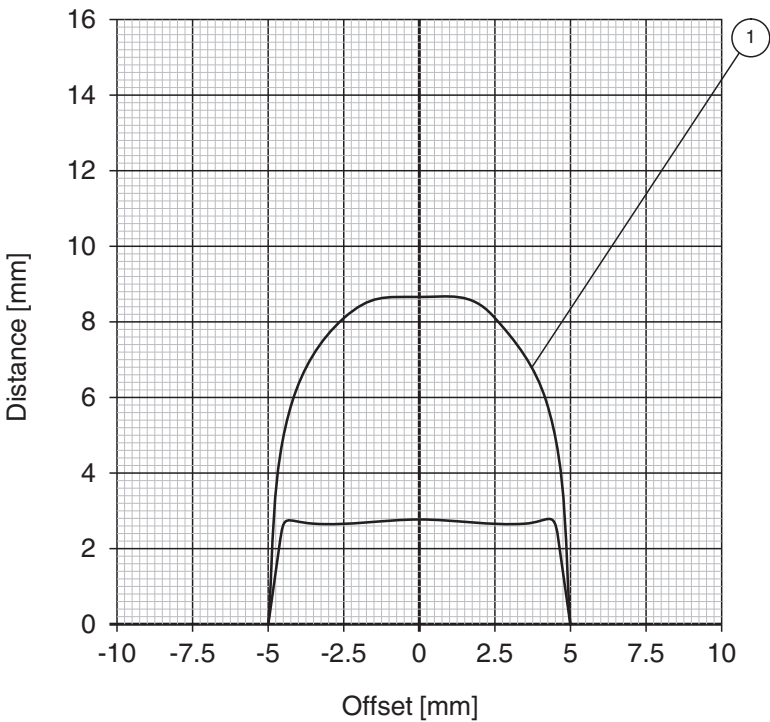

Release date: 2022-02-01 Date of issue: 2022-02-01 Filename: 263242_eng.pdf

Reading range in steel IQC21-12.4

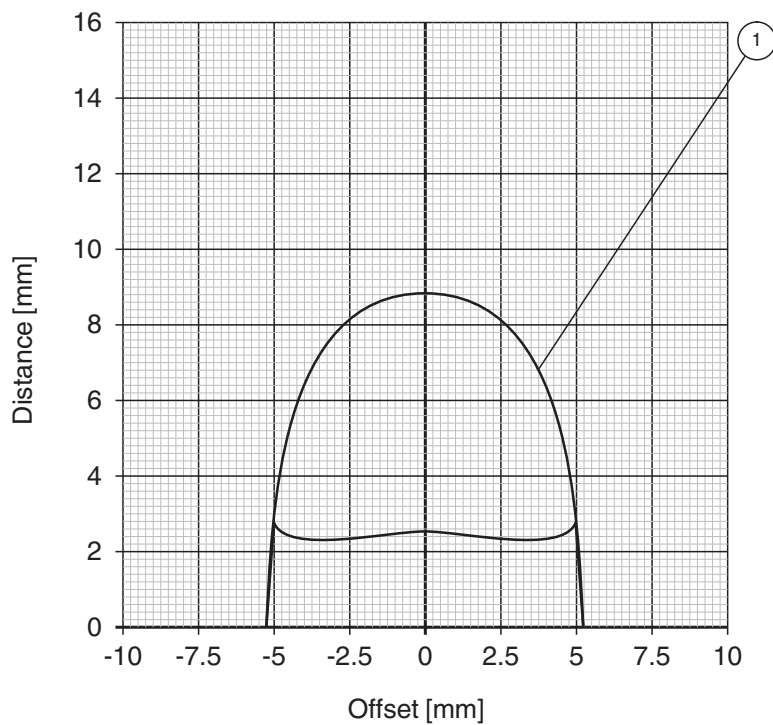

- ① IQH1-18GM-V1 ② IQH1-F61-V1 ③ IQH1-FP-V1
 ④ IQH1-F15-V1