



Read/write station

IQT1-FP-IO-V1

- Operating frequency 13.56 MHz
- IO-Link interface
- Conforms to ISO 15693
- Suitable for FRAM transponder
- LEDs as function indicators
- Connection via V1 (M12 x 1) plug connection
- Degree of protection IP67
- For connection to IO-Link master


HF read/write station with IO-Link in accordance with ISO 15693



Safety Information

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Dimensions

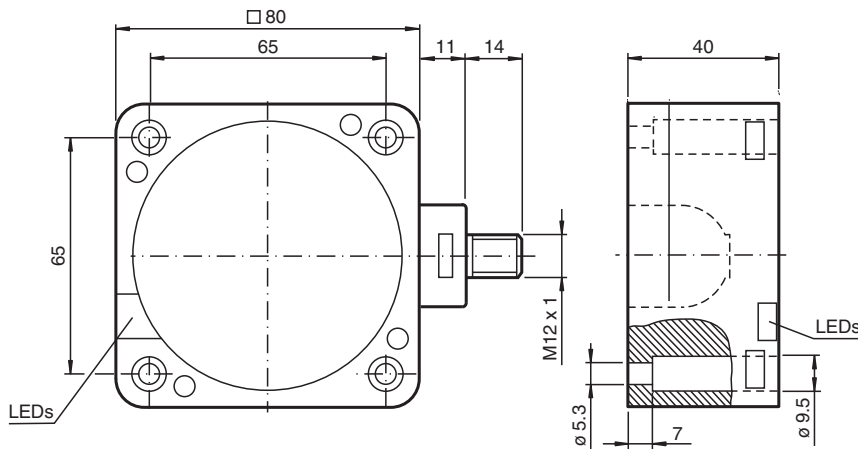

Technical Data

General specifications

Operating frequency	13.56 MHz
Transfer rate	26 kBit/s
Sensing range	
Read distance	0 ... 130 mm
Write distance	0 ... 130 mm
Width	max. 100 mm
UL File Number	E87056

Functional safety related parameters

MTTF _d	280 a
Mission Time (T _M)	10 a

Technical Data

Diagnostic Coverage (DC)		0 %	
Indicators/operating means			
LED red/green		Green: power on Flashing green: IO-Link communication Flashing red/green: IO-Link communication interrupted	
LED blue/yellow		Blue: Write/read attempt performed Yellow: Read/write tag detected	
Electrical specifications			
Rated operating voltage		U _e	20 ... 30 V DC , ripple 10 % _{SS}
No-load supply current		I ₀	≤ 70 mA (at 24 V DC)
Power consumption		P ₀	≤ 2 W
Interface			
Interface type		IO-Link	
IO-Link revision		1.1	
Vendor ID		1 (0x0001)	
Device ID		4194561 (0x400101)	
Data transmission rate		COM3 (230.4 kBaud)	
Min. cycle time		4 ms	
SIO mode support		no	
Compatible master port type		Class A Class B	
Directive conformity			
Radio equipment			
Directive 2014/53/EU		EN 301489-1 EN 301489-3 EN 300330 EN 62368-1 EN 50364	
RoHS			
Directive 2011/65/EU (RoHS)		IEC/EN 63000	
Standard conformity			
Degree of protection		EN 60529	
Communication interface		IEC 61131-9 / IO-Link V1.1.2	
RFID		ISO/IEC 15693-2 ISO/IEC 15693-3 ISO/IEC 18000-3	
Approvals and certificates			
UL approval		cULus Listed, Class 2 Power Source, Type 1 enclosure	
FCC approval		This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. Caution: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.	
IC approval		This device complies with Industry Canada licence-exempt RSS standard(s) and with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device. Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.	
MIC approval		AC-21098	
Radio approval		USA: FCC IREIQT1FPIO Canada: 7037A-IQT1FPIO	
Ambient conditions			
Ambient temperature		-25 ... 70 °C (-13 ... 158 °F)	
Storage temperature		-40 ... 85 °C (-40 ... 185 °F)	


Release date: 2022-02-04 Date of issue: 2022-02-04 Filename: 299929_eng.pdf

Technical Data

Mechanical specifications

Housing length	108.5 mm
Housing width	80 mm
Housing height	40 mm
Degree of protection	IP67
Connection	connector M12 x 1
Material	
Housing	PBT
Base	diecast aluminum
Encapsulation compound	CY 221/HY 2966
Installation	
Distance between two heads	≥ 150 mm
Mass	approx. 380 g

Connection

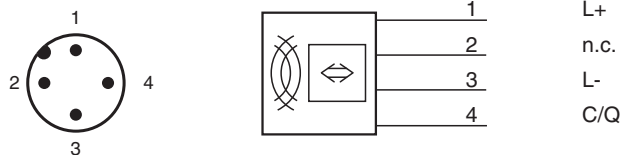

Accessories

	ICE1-8IOL-S2-G60L-V1D	Ethernet IO-Link master with PROFINET S2 redundancy
	IQC21-16 50pcs	Data carrier
	IQC21-30 25pcs	Data carrier
	IQC21-50F-T10	Data carrier
	IQC21-58	Data carrier
	IQC22-22-T9 50pcs	Data carrier
	IQC33-20 50pcs	Data carrier
	IQC33-30 25pcs	Data carrier
	IQC33-50 25pcs	Data carrier
	V1-G-0,3M-PVC-V1-G	Cordset M12 socket straight to M12 plug straight A-coded, 4-pin, PVC cable grey

Accessories

	V1-G-5M-PVC-V1-G	Cordset M12 socket straight to M12 plug straight A-coded, 4-pin, PVC cable grey
	V1-G-10M-PVC-V1-G	Cordset M12 socket straight to M12 plug straight A-coded, 4-pin, PVC cable grey
	ICE2-8IOL-G65L-V1D	EtherNet/IP IO-Link master with 8 inputs/outputs
	ICE3-8IOL-G65L-V1D	PROFINET IO IO-Link master with 8 inputs/outputs
	ICE2-8IOL-K45S-RJ45	EtherNet/IP IO-Link master with 8 inputs/outputs, DIN rail, screw terminal
	ICE3-8IOL-K45P-RJ45	PROFINET IO IO-Link master with 8 inputs/outputs, DIN rail, push-in terminals
	ICE3-8IOL-K45S-RJ45	PROFINET IO IO-Link master with 8 inputs/outputs, DIN rail, screw terminal
	IO-Link-Master02-USB	IO-Link master, supply via USB port or separate power supply, LED indicators, M12 plug for sensor connection
	ICE1-8IOL-G30L-V1D	Ethernet IO-Link module with 8 inputs/outputs
	ICE1-8IOL-G60L-V1D	Ethernet IO-Link module with 8 inputs/outputs
	ICE2-8IOL-K45P-RJ45	EtherNet/IP IO-Link master with 8 inputs/outputs, DIN rail, push-in connectors