

DL 155/185 LED

OFFICE LIGHTING




SPECIFICATION

Ingress protection class:	IP54
Impact resistance:	IK08
Total luminous flux:	650lm - 2100lm / 4000K
Colour temperature (CCT):	3000K, 4000K
Energy efficiency class (EEI):	A
Power supply:	230V/50Hz
Mounting:	recessed in modular ceiling recessed in plasterboard ceiling
Cover:	PMMA opal
Body:	die cast aluminium

Round LED downlight intended for recessed mounting with high luminous flux (100 lm/W), even light distribution and high ingress protection class IP54. Includes an integrated energy-saving light source LED GO!. Diecast aluminium body, powder-coated white; opal PMMA diffuser. Colour temperature 3000K/4000K, CRI>80, lifespan of LED 50.000h (L70@25°C).

LIGHT BEAM CURVES

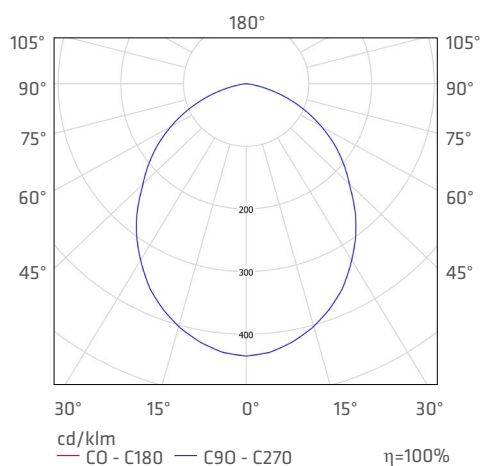


APPLICATION

Luminaire intended for both indoor (offices, passageways, utility rooms) as well as outdoor use. Provides good surface lighting and works very well in situations that require eyesight concentration. Available in two housing sizes; suited for mounting in all types of suspended ceilings (modular, plasterboard).

DL 155/185 LED

OFFICE LIGHTING


DL 155 LED

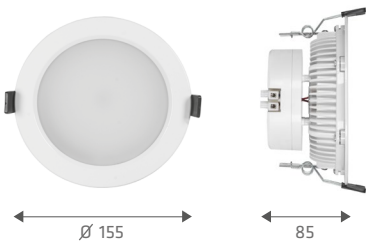

power [W]	colour temperature (CCT)	total luminous flux [lm]	diffuser	EEL	index
7W	3000K	600	PLX	A	057700
7W	4000K	650	PLX	A	057717
14W	3000K	1200	PLX	A	057724
14W	4000K	1300	PLX	A	057731



DL 185 LED

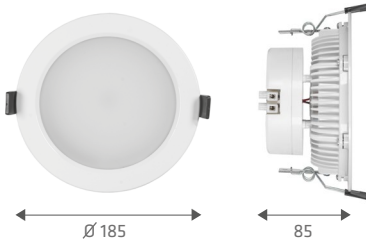

power [W]	colour temperature (CCT)	total luminous flux [lm]	diffuser	EEL	index
14W	3000K	1400	PLX	A	057809
14W	4000K	1500	PLX	A	057816
21W	3000K	1950	PLX	A	057823
21W	4000K	2100	PLX	A	057830

