





PORTAL



PORTAL 1x11W

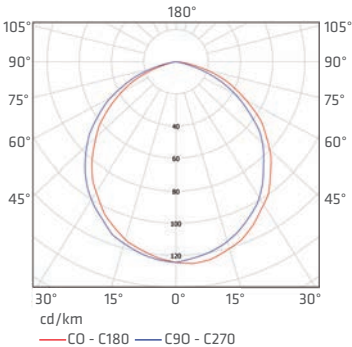

index index	max moc max power	trzonek end cap	rodzaj klosza type of diffuser	EVG/VVG	waga netto net weight	wymiary produktu product dimensions A/B/C	klasa ochrony protection class
200137	1x9W	G23	OPAL	VVG	0,70	280/185/45	
886348	1x9W	2G7	OPAL	EVG	0,38	280/185/45	
200168	1x11W	G23	OPAL	VVG	0,70	280/185/45	
886355	1x11W	2G7	OPAL	EVG	0,40	280/185/45	
200144	2x9W	G23	OPAL	VVG	0,90	280/185/45	
Z czujnikiem zmierzchu With dusk sensor							
201134	1x9W	G23	OPAL	VVG	0,70	280/185/45	
201165	1x11W	G23	OPAL	VVG	0,79	280/185/45	



Wysoka odporność na uderzenia IK 08
Możliwość stosowania na zewnątrz budynków IP54
Smukły kształt

Podstawa: tworzywo sztuczne
Klosz: PC (polycarbonat)
Klosz: opal
Źródło światła: w komplecie

High impact resistance IK 08
Possibility of outside application IP54
Slender shape

Base: plastic
Diffuser: polycarbonate
Diffuser: opal
Light source: in the set

Hohe Schlagbeständigkeit IK 08
Geeignet fuer die Aussenbeleuchtung an Gebaeuden IP54
Universelle Form

Unterteil aus Kunststoff
Abdeckung: PC (Polycarbonat)
Abdeckung: opal
Inkl. Lichtquelle

Haute résistance au choc IK 08
Possibilité de montage à l'extérieur du bâtiment IP54
Forme epure

Le corps: en matière plastique
Diffuseurr: PC (polycarbonate)
Diffuseurr: opale
Source de lumière: fourni

Высокая ударпрочность IK 08
Возможность наружного применения IP65
Заостренный обвод

Корпус: пласмасса
Плафон: PC (из поликарбоната)
Плафон: опал
Источник света в комплекте