
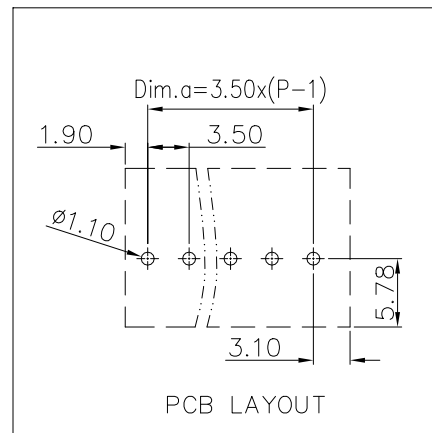


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



HOW TO ORDER:

- Customer request

- Color:

N/A: Grey; 002: Orange;

003: Red; 004: Blue;

005: Yellow; 006: Green;

008:Light Gray

24:24 contacts

Serieis
No.

Poles:
02:02 contacts
03:03 contacts

24:24 contacts

NOTES:

UL/CUL Standard

1. Conductor cross section : 24~16AWG

2. Rated Voltage/Current :

Use group	B	C	D
Rated voltage(V)	300	—	300
Rated current(A)	6	—	6

IEC Standard

1. Conductor cross section : $0.2 \sim 1.5 \text{ mm}^2$

2. Rated Voltage/Current :

Surge voltage category	Ⅲ	Ⅲ	Ⅱ
Pollution degree	3	2	2
Rated surge voltage(KV)	2.5	2.5	2.5
Rated voltage(V)	160	160	320
Rated current(A)	17.5	17.5	17.5

Material:

Insulator	PA66	UL94 V-0
Conductor	COPPER ALLOY	Sn,Plated
Spring	STAINLESS STEEL	

General information:

1.Dimension shall be interpreted per
ASME Y14.5-2009

2.Pitch : 3.50mm, Poles : 02~24P

3.Stripping length : 5~6mm

4. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

5. RoHS Compliance

6. Wave soldering temperature:

260±5°C, 5 seconds

7.Undimensioned Tolerances:

Pitch Range In mm			Nominal Dimension Range In mm					
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	0.1/10	
							<	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2

Connection method:

1. For Solid wire, peeling wire in right length, push down spring to clasp the wire.

2. For stranded wire, connect directly after peeling in right length, or wire furrled and fix in by pushing the spring.

订货号 Order No.	2393XX		名 称 Name	2393XX 系列PCB电路板用组合端子排	未注公差 Tolerance	表面 Surface	
项 目 Item	签 字 Signature	日 期 Date			Tolerance Table	VDI21	
设 计 Design	LZT	2020.06.16	图 号 Drawing No.	PRM000751	版本号 Revision Number	重量 Weight	比例 Scale
审 核 Check	XJ	2020.06.16	材 料 Material	Notes	MO		1:1
工 艺 Process	-	-	物料号 Item No.	/	第1页/共1页 1 of 1	 mm	
标准化 Unify	-	-		...	SUPU 宁波睿普电子有限公司		
批 准 Approve	LWL	2020.06.16		/	NINGBO SUPU ELECTRONICS CO.,LTD.		