
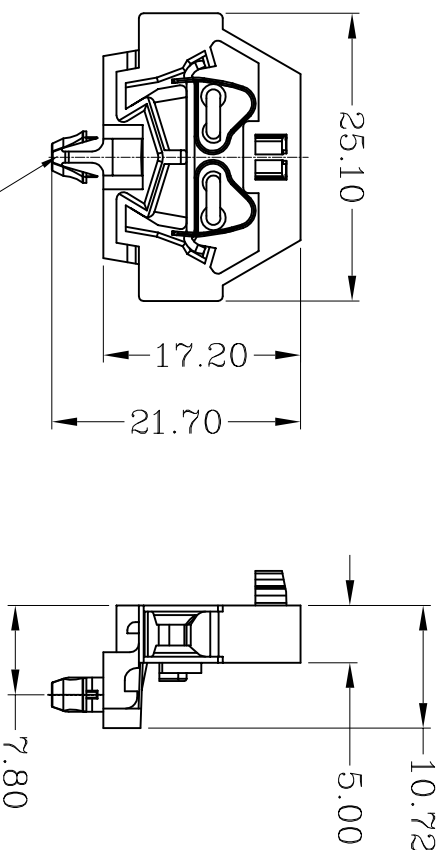


IEC 额定数据 / IEC Rated data

接线范围/Wire range	0.2-1.5mm ²
单股导线/Solid	0.2-1.5mm ²
软导线/Stranded	0.2-1.5mm ²
带端头软导线/Stranded with ferrules without plastic sleeve	0.2-1.0mm ²
带预绝缘端头软导线/Stranded with ferrules with plastic sleeve	0.2-1.0mm ²
剥线长度/Strip length	8-9mm
额定电压/Rated voltage	400V
额定电流/Rated current	18A
额定脉冲耐受电压/Rated surge voltage	6kV
污染等级/Pollution degree	3
过电压类别/Surge voltage category	III
其他信息/Other information	
塑件/Housing	PA66
触点材料/Contact	铜合金/Copper alloy
镀层/Coating	锡/Tin Plated
阻燃等级/Flame retardant rating	UL94-V0
使用环境温度/Usage ambient temperature	-25℃ - +70℃
储存及运输环境温度/ Storage ambient temperature	-40℃ - +85℃
认证/Approval	 



Order Info 订货信息

订货号	颜色
PART NUMBER	COLOR
240311	灰色 Gray
240312	橙色 Orange
240313	白灰色 Light Gray
240314	蓝色 Blue
240315	黄色 Yellow
240316	绿色 Green
240319	粉红色 Pink
240317	黄绿色 Green-yellow

未标注公差参照GB/T14486

基本尺寸	0-3	>3-6	>6-10	>10-14	>14-18	>18-24	>24-30	>30-40	>40-50	>50-65	>65-80	>80-100	>100-120	>120-140
公差	± 0.08	± 0.09	± 0.10	± 0.12	± 0.14	± 0.16	± 0.18	± 0.21	± 0.24	± 0.28	± 0.32	± 0.36	± 0.41	± 0.46

		Rev. 01	Name 2403 IX 系列带销钉侧面接线端子 2403 IX series through terminal blocks with snap-in mounting feet of side-entry
单位/unit mm			