




宁波速普电子有限公司

NINGBO SUPU ELECTRONICS.CO.,LTD

产品规格书 Product Specification

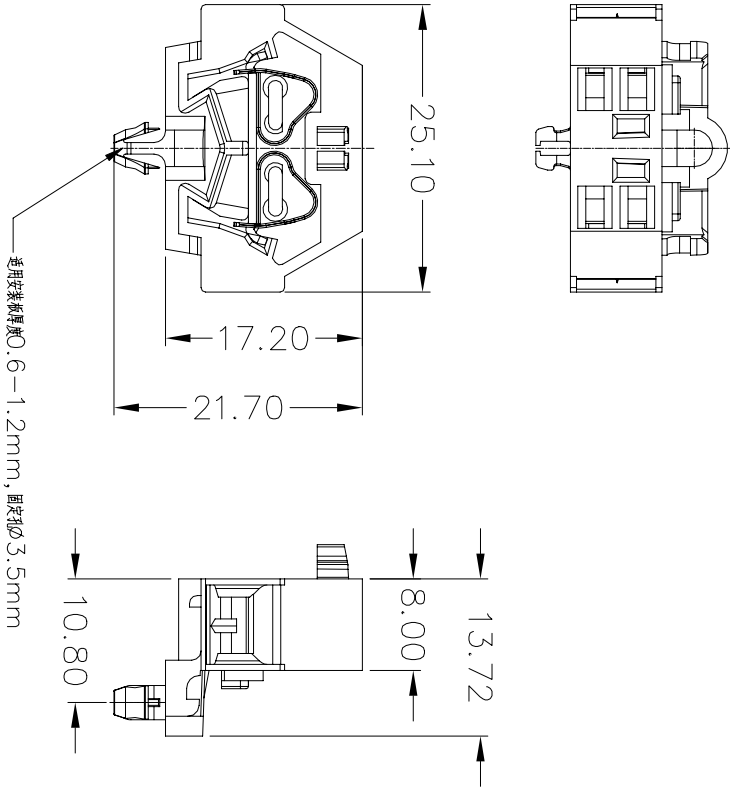

订货信息 Order Info

订货号	颜色
PART NUMBER	COLOR
240341	灰色 Gray
240342	橙色 Orange
240343	白灰色 Light Gray
240344	蓝色 Blue
240345	黄色 Yellow
240346	绿色 Green
240349	粉红色 Pink
240347	黄绿色 Green-yellow

未注尺寸公差:

Pitch	Range	In mm	Nominal	Dimension	Range		
mm							
Over	6	Over	10	Over	30	Over	60
TO	10	TO	24	TO	30	TO	60
6	10	24	30	60	100	150	
±0.075	±0.15	±0.20	±0.20	±0.35	±0.50	±0.75	±1.00

		Rev. 01	Name
单位/Unit	mm		24034X系列带销钉侧面接线端子 24034X series through terminal blocks with snap-in mounting feet of side-entry

IEC 额定数据/IEC Rated data	
接线范围/Wire range	0.2-1.5mm ²
单股导线/Solid	0.2-1.5mm ²
软导线/Stranded	0.2-1.5mm ²
带端头软导线/Stranded with ferrules without plastic sleeve	0.2-1.0mm ²
带预绝缘端头软导线/Stranded with ferrules with plastic sleeve	0.2-1.0mm ²
剥线长度/Strip length	8-9mm
额定电压/Rated voltage	400V
额定电流/Rated current	18A
额定脉冲耐受电压/Rated surge voltage	6KV
污染等级/Pollution degree	3
过电压类别/Surge voltage category	III
其他信息/Other information	
塑件/Housing	PA66
触点材料/Contact	铜合金/Copper alloy
镀层/Coating	锡/Tin Plated
阻燃等级/Flame retardant rating	UL94-V0
使用环境温度/Usage ambient temperature	-25℃ - +70℃
储存及运输环境温度/Storage ambient temperature	-40℃ - +85℃
认证/Approval	