



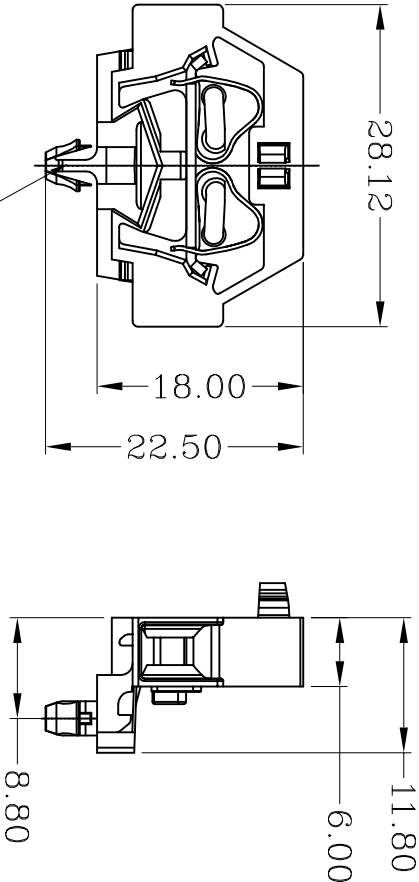

宁波速普电子有限公司
NINGBO SUPU ELECTRONICS.CO.,LTD

产品规格书
Product Specification



订货信息 Order Info

订货号	颜色
PART NUMBER	COLOR
241311	灰色 Gray
241312	橙色 Orange
241313	白灰色 Light Gray
241314	蓝色 Blue
241315	黄色 Yellow
241316	绿色 Green
241319	粉红色 Pink
241317	黄绿色 Green-yellow

未标注公差参照GB/T14486															
基本尺寸	0-3	>3-6	>6-10	>10-14	>14-18	>18-24	>24-30	>30-40	>40-50	>50-65	>65-80	>80-100	>100-120	>120-140	
公差	±0.08	±0.09	±0.10	±0.12	±0.14	±0.16	±0.18	±0.21	±0.24	±0.28	±0.32	±0.36	±0.41	±0.46	

IEC 额定数据/IEC Rated data	
接线范围/Wire range	0.2-2.5mm ²
单股导线/Solid	0.2-2.5mm ²
软导线/Stranded	0.2-2.5mm ²
带端头软导线/Stranded with ferrules without plastic sleeve	0.2-1.5mm ²
带预绝缘端头软导线/Stranded with ferrules with plastic sleeve	0.2-1.5mm ²
剥线长度/Strip length	8-9mm
额定电压/Rated voltage	500V
额定电流/Rated current	24A
额定脉冲耐受电压/Rated surge voltage	6KV
污染等级/Pollution degree	3
过电压类别/Surge voltage category	III
其他信息/Other information	
塑件/Housing	PA66
触点材料/Contact	铜合金/Copper alloy
镀层/Coating	锡/Tin Plated
阻燃等级/Flame retardant rating	UL94-V0
使用环境温度/Usage ambient temperture	-25℃ - +70℃
储存及运输环境温度/Storage ambient temperature	-40℃ - +85℃
认证/Approval	

		Rev. 01	Name
单位/unit	mm		24131X系列带销钉侧面接线端子 24131X series through terminal blocks with snap-in mounting feet of side-entry