


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.

未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

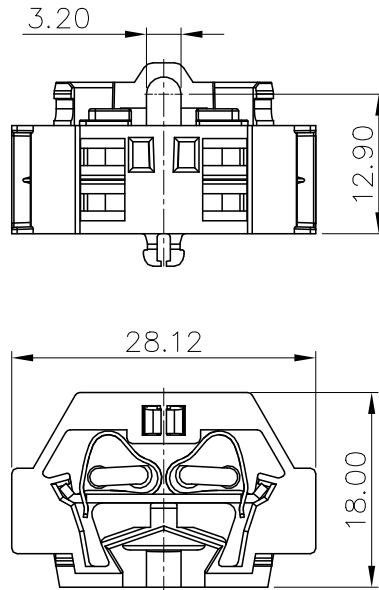

HOW TO ORDER:



24133X

Sereies
No.

Color:

- 1: Grey 5: Yellow
2: Orange 6: Green
3: Light grey 7: Green—yellow
4: Bule 9: Pink

订货号 PART NUMBER	物料号 Item	颜色 COLOR
241331	411061301	灰色 Grey
241332	411061302	橙色 Orange
241333	411061303	白灰色 Light Grey
241334	411061304	蓝色 Blue
241335	411061305	黄色 Yellow
241336	411061306	绿色 Green
241337	411061307	黄绿色 Yellow Green
241339	411061309	粉红色 Pink



NOTES:

UL/CUL Standard

1.Conductor cross section : 28~14AWG

2.Rated Voltage/Current :

Use group	B	C	D
Rated voltage(V)	300	300	
Rated current(A)	15	15	

IEC Standard

1.Conductor cross section :

Wire range(Solid/Stranded)	0.2~2.5mm ²
Solid	0.2~2.5mm ²
Stranded	0.2~2.5mm ²
Stranded with ferrules without plastic sleeve	0.2~1.5mm ²
Stranded with ferrules with plastic sleeve	0.2~1.5mm ²

2.Rated Voltage/Current :

Surge voltage category	III
Pollution degree	3
Rated surge voltage(KV)	6
Rated voltage(V)	400
Rated current(A)	18

Material:

Insulator	PA66	UL94 V-0
Conductor	Copper alloy	Sn plated
Spring	Stainless steel	

General information:

1.Dimension shall be interpreted per

ASME Y14.5-2009

2.Stripping length : 8-9mm

3.Operating temperature: -40°C~+105°C

4.RoHS Compliance

5.Undimensioned Tolerances:

Pitch Range In mm	Nominal Dimension Range In mm	—	∩	∇
TO 6	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	0.1/10
±0.15	±0.20	±0.30	±0.50	±0.70
±1.00	±1.30	±2*		

Connection method:

1. For Solid wire, peeling wire in right length, push down spring to clappthe wire.

2. For stranded wire, connect directly after peeling in right length, or wire furruled and fix in by pushingthe spring.

订货号 Order No.	24133X		名称 Name	24133X系列带固定 器侧面接线端子	未注公差 Tolerance	表面 Surface
项目 Item	签字 Signature	日期 Date			Tolerances Table	VDI21
设计 Design	CJH	05/24/24*	图号 Drawing No.	PRM000544	版本号 Revision Number	重量 Weight
审核 Check	LXW	05/24/24*	材料 Material	Notes	M0	比例 Scale
工艺 Process	—	—	物料号 Item No.	见附表	第1页/共1页 1 of 1	mm
标准化 Unify	—	—				
批准 Approve	LWL	05/24/24*				

SUPU 宁波盛普电子有限公司
NINGBO SUPU ELECTRONICS CO.,LTD.