



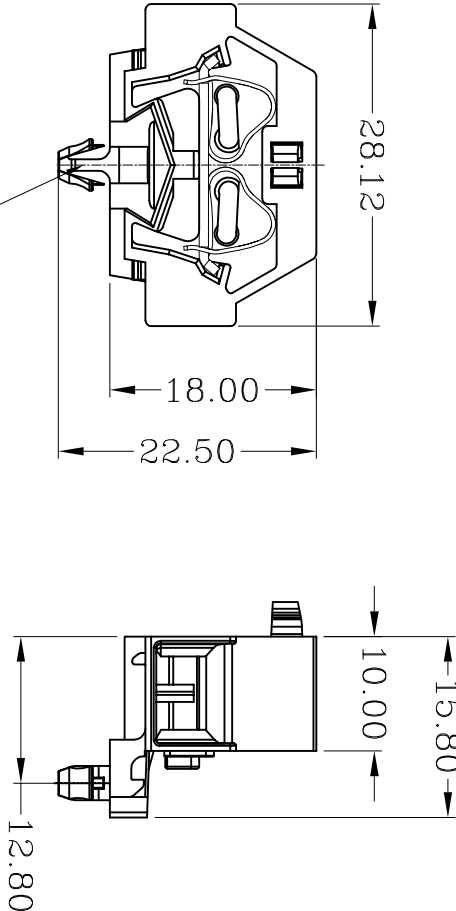

宁波速普电子有限公司
NINGBO SUPU ELECTRONICS.CO.,LTD

产品规格书
Product Specification



订货信息 Order Info

订货号 PART NUMBER	颜色 COLOR
241341	灰色 Gray
241342	橙色 Orange
241343	白灰色 Light Gray
241344	蓝色 Blue
241345	黄色 Yellow
241346	绿色 Green
241349	粉红色 Pink
241347	黄绿色 Green-yellow

未标注公差参照GB/T14486															
基本尺寸	0-3	>3-6	>6-10	>10-14	>14-18	>18-24	>24-30	>30-40	>40-50	>50-65	>65-80	>80-100	>100-120	>120-140	
公差	±0.08	±0.09	±0.10	±0.12	±0.14	±0.16	±0.18	±0.21	±0.24	±0.28	±0.32	±0.36	±0.41	±0.46	

IEC 额定数据/IEC Rated data	
接线范围/Wire range	0.2-2.5mm ²
单股导线/Solid	0.2-2.5mm ²
软导线/Stranded	0.2-2.5mm ²
带端头软导线/Stranded with ferrules without plastic sleeve	0.2-1.5mm ²
带预绝缘端头软导线/Stranded with ferrules with plastic sleeve	0.2-1.5mm ²
剥线长度/Strip length	8-9mm
额定电压/Rated voltage	500V
额定电流/Rated current	24A
额定脉冲耐受电压/Rated surge voltage	6KV
污染等级/Pollution degree	3
过电压类别/Surge voltage category	III
其他信息/Other information	
塑件/Housing	PA66
触点材料/Contact	铜合金/Copper alloy
镀层/Coating	锡/Tin Plated
阻燃等级/Flame retardant rating	UL94-V0
使用环境温度/Usage ambient temperature	-25℃ - +70℃
储存及运输环境温度/Storage ambient temperature	-40℃ - +85℃
认证/Approval	CQC

		Rev. 01	Name
单位/unit	mm		24134X系列带销钉侧面接线端子 24134X series through terminal blocks with snap-in mounting feet of side-entry