

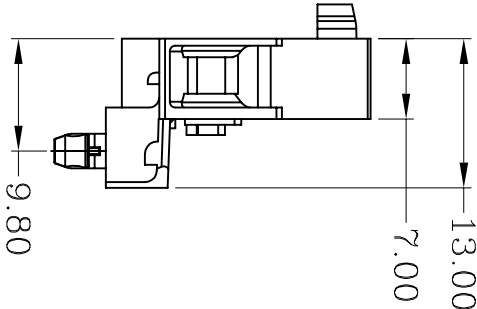


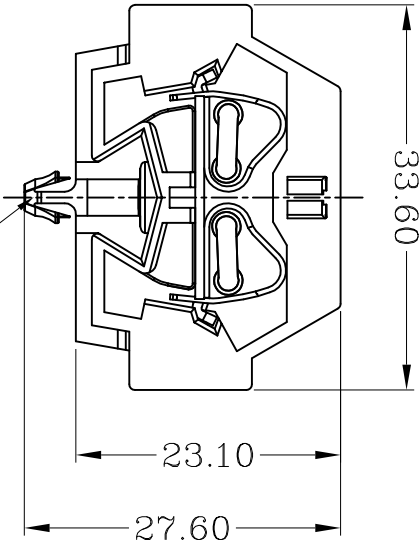

宁波速普电子有限公司
NINGBO SUPU ELECTRONICS.CO.,LTD

产品规格书
Product Specification

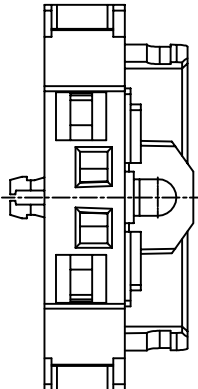

订货信息 Order Info

订货号	颜色
PART NUMBER	COLOR
242311	灰色 Grey
242312	橙色 Orange
242313	白灰色 Light Gray
242314	蓝色 Blue
242315	黄色 Yellow
242316	绿色 Green
242319	粉红色 Pink
242317	黄绿色 Green-yellow

未标注公差参照GB/T14486

基本尺寸	0-3	>3-6	>6-10	>10-14	>14-18	>18-24	>24-30	>30-40	>40-50	>50-65	>65-80	>80-100	>100-120	>120-140
公差	±0.08	±0.09	±0.10	±0.12	±0.14	±0.16	±0.18	±0.21	±0.24	±0.28	±0.32	±0.36	±0.41	±0.46

IEC 额定数据/IEC Rated data	
接线范围/Wire range	0.2-4.0mm ²
单股导线/Solid	0.2-4.0mm ²
软导线/Stranded	0.2-4.0mm ²
带端头软导线/Stranded with ferrules without plastic sleeve	0.2-2.5mm ²
带预绝缘端头软导线/Stranded with ferrules with plastic sleeve	0.2-2.5mm ²
剥线长度/Strip length	9-10mm
额定电压/Rated voltage	630V
额定电流/Rated current	24A
额定脉冲耐受电压/Rated surge voltage	8KV
污染等级/Pollution degree	3
过电压类别/Surge voltage category	III
其他信息/Other information	
塑件/Housing	PA66
触点材料/Contact	铜合金/Copper alloy
镀层/Coating	锡/Tin Plated
阻燃等级/Flame retardant rating	UL94-V0
使用环境温度/Usage ambient temperature	-25℃ - +70℃
储存及运输环境温度/Storage ambient temperature	-40℃ - +85℃
认证/Approval	CQC

		Rev. 01	Name 24231X系列带销钉侧面接线端子 24231X series through terminal blocks with snap-in mounting feet of side-entry
单位/unit	mm		