




宁波速普电子有限公司
NINGBO SUPU ELECTRONICS.CO.,LTD

产品规格书
Product Specification

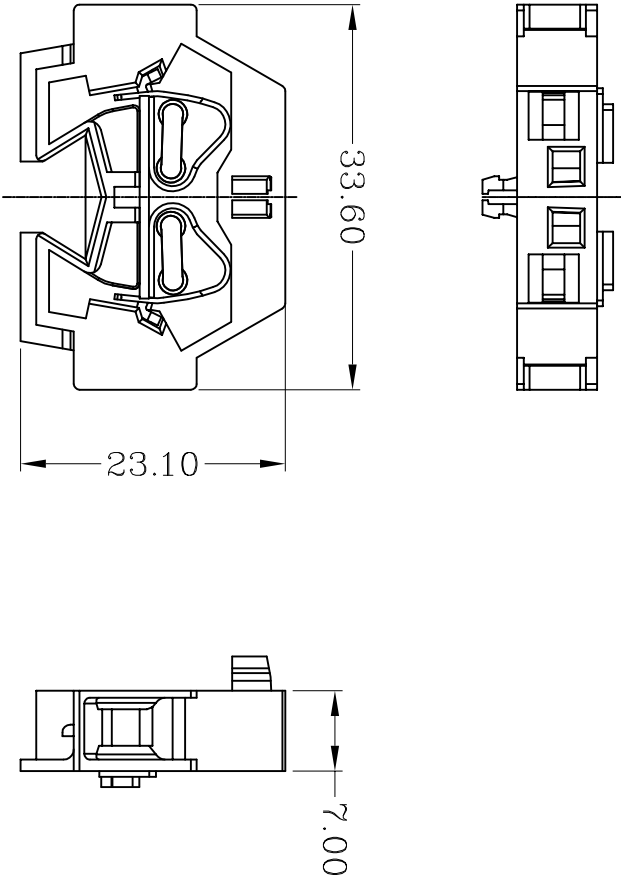

订货信息 Order Info

订货号	颜色
PART NUMBER	COLOR
242321	灰色 Gray
242322	橙色 Orange
242323	白灰色 Light Gray
242324	蓝色 Blue
242325	黄色 Yellow
242326	绿色 Green
242329	粉红色 Pink
242327	黄绿色 Green-yellow

未标注公差参照GB/T14486															
基本尺寸	0-3	>3-6	>6-10	>10-14	>14-18	>18-24	>24-30	>30-40	>40-50	>50-65	>65-80	>80-100	>100-120	>120-140	
公差	±0.08	±0.09	±0.10	±0.12	±0.14	±0.16	±0.18	±0.21	±0.24	±0.28	±0.32	±0.36	±0.41	±0.46	

IEC 额定数据/IEC Rated data	
接线范围/Wire range	0.2-4.0mm ²
单股导线/Solid	0.2-4.0mm ²
软导线/Stranded	0.2-4.0mm ²
带端头软导线/Stranded with ferrules without plastic sleeve	0.2-2.5mm ²
带预绝缘端头软导线/Stranded with ferrules with plastic sleeve	0.2-2.5mm ²
剥线长度/Strip length	9-10mm
额定电压/Rated voltage	630V
额定电流/Rated current	24A
额定脉冲耐受电压/Rated surge voltage	8kV
污染等级/Pollution degree	3
过电压类别/Surge voltage category	III
其他信息/Other information	
塑件/Housing	PA66
触点材料/Contact	铜合金/Copper alloy
镀层/Coating	锡/Tin Plated
阻燃等级/Flame retardant rating	UL94-V0
使用环境温度/Usage ambient temperature	-25℃ - +70℃
储存及运输环境温度/Storage ambient temperature	-40℃ - +85℃
认证/Approval	CQC

		Rev. 01	Name
单位/unit	mm		24232X系列带侧面接线终端端子 24232X series through end terminal blocks with fixing flanges of side-entry