




宁波速普电子有限公司

NINGBO SUPU ELECTRONICS.CO.,LTD

产品规格书

Product Specification

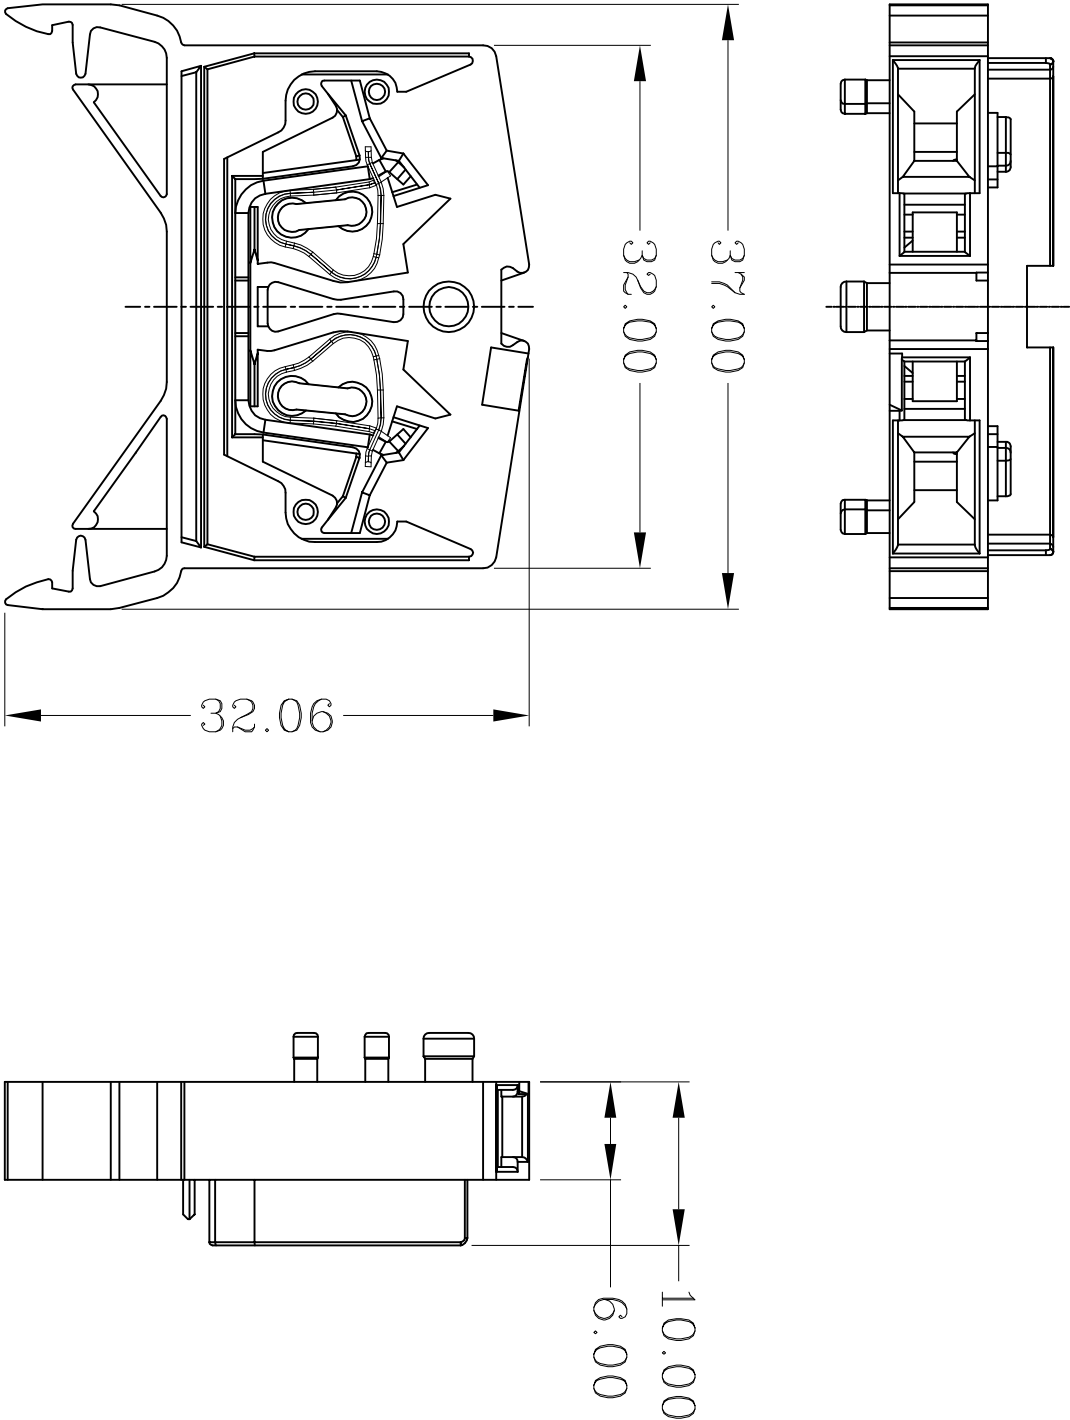

订货信息 Order Info

订货号	颜色
PART NUMBER	COLOR
254371	灰色 Gray
254372	橙色 Orange
254373	白灰色 Light Gray
254374	蓝色 Blue
254375	黄色 Yellow
254376	绿色 Green
254377	黄绿色 Green-yellow

未标注公差参照GB/T14486												
基本尺寸	0-3	>3-6	>6-10	>10-14	>14-18	>18-24	>24-30	>30-40	>40-50	>50-65	>65-80	>80-100
公差	±0.08	±0.09	±0.10	±0.12	±0.14	±0.16	±0.18	±0.21	±0.24	±0.28	±0.32	±0.36

IEC 额定数据/IEC Rated data			
接线范围/Wire range		0.2-2.5mm ²	
单股导线/Solid		0.2-2.5mm ²	
软导线/Stranded		0.2-2.5mm ²	
带端头软导线/Stranded with ferrules without plastic sleeve		0.2-1.5mm ²	
带预绝缘端头软导线/Stranded with ferrules with plastic sleeve		0.2-1.5mm ²	
剥线长度/Strip length		8-9mm	
额定电压/Rated voltage		800V	
额定电流/Rated current		24A	
额定脉冲耐受电压/Rated surge voltage		8KV	
污染等级/Pollution degree		3	
过电压类别/Surge voltage category		III	
UL 额定数据/UL Rated data	B	C	D
额定电流/Rated current	20A	20A	—
额定电压/Rated voltage	600V	600V	—
接线范围/Wire range	28-12AWG		
其他信息/Other information			
塑件/Housing		PA66	
触点材料/Contact		铜合金/Copper alloy	
镀层/Coating		锡/Tin Plated	
阻燃等级/Flame retardant rating		UL94-V0	
使用环境温度/Usage ambient temperature		-25℃ - +70℃	
储存及运输环境温度/Strrage ambient temperature		-40℃ - +85℃	
导轨尺寸/rails Size		SP35X7.5/35X15	
认证/Approval		cPAI [®] us CAC	
25437X系列正面板接线端子(大导轨SP35) 25437X series through terminal blocks of front-entry (SP35)			

	Rev. 01	Name
单位/Unit	mm	