




宁波速普电子有限公司

NINGBO SUPU ELECTRONICS.CO.,LTD

产品规格书

Product Specification

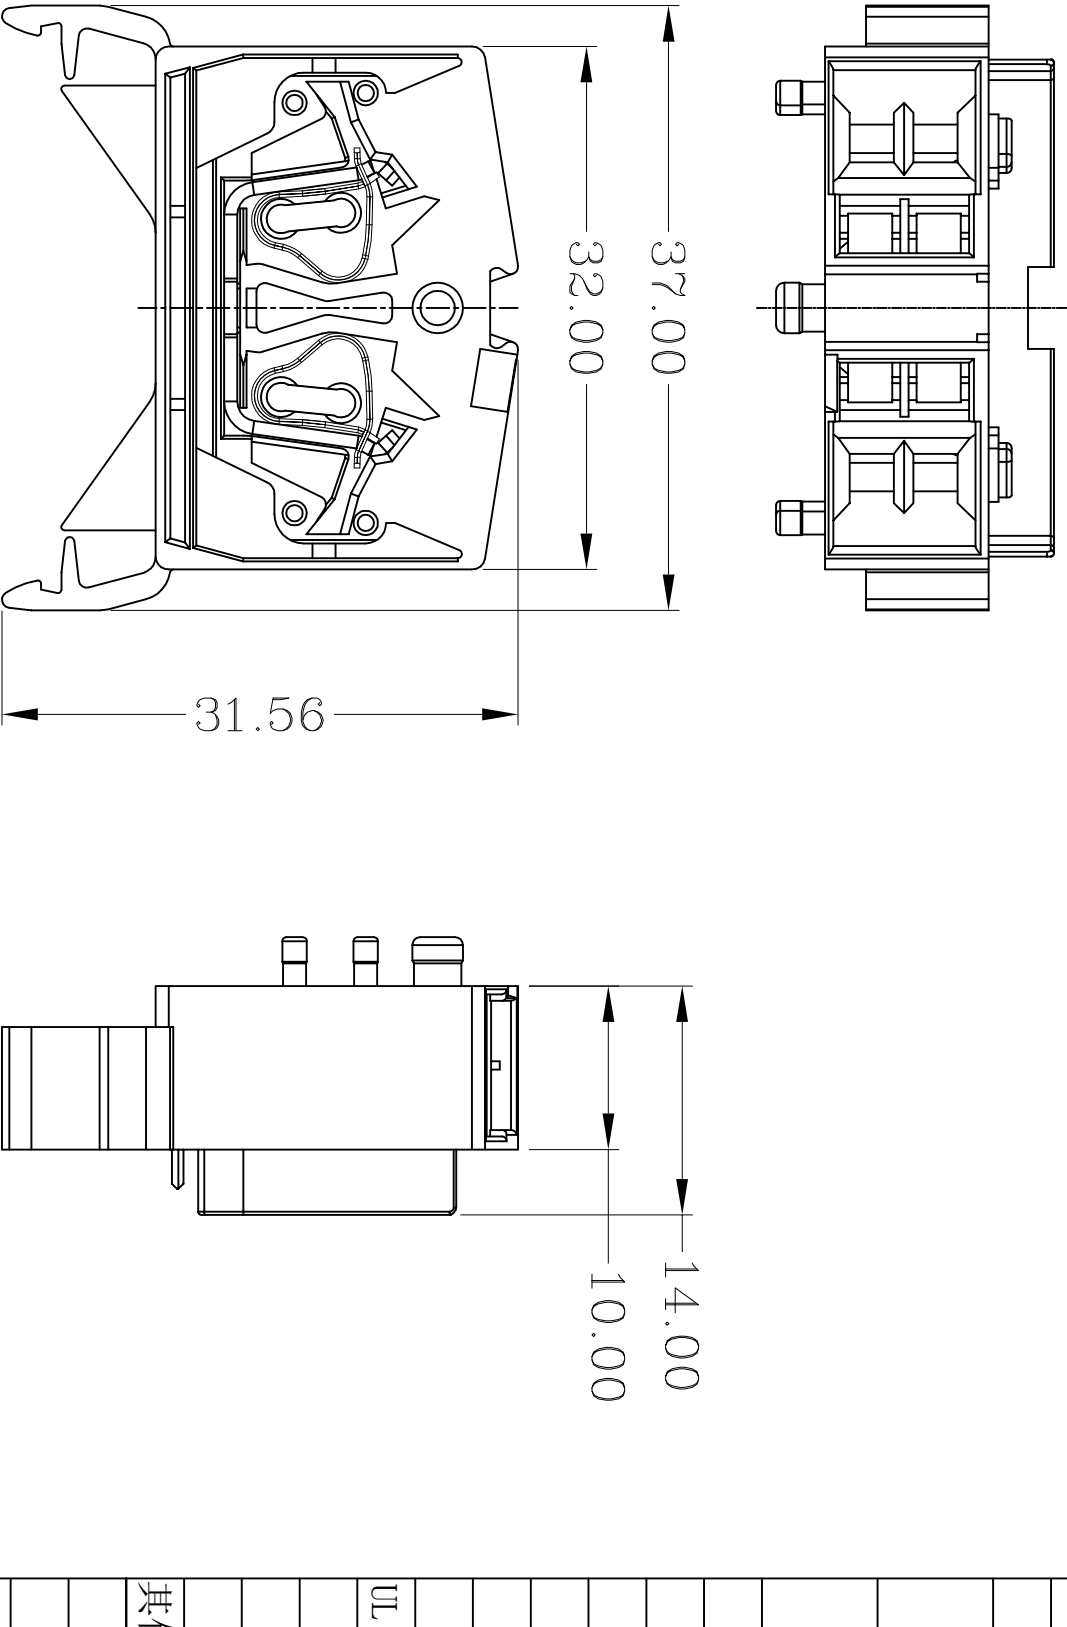

IEC 额定数据/IEC Rated data			
接线范围/Wire range	0.2-2.5mm ²		
单股导线/Solid	0.2-2.5mm ²		
软导线/Stranded	0.2-2.5mm ²		
带端头软导线/Stranded with ferrules without plastic sleeve	0.2-1.5mm ²		
带预绝缘端头软导线/Stranded with ferrules with plastic sleeve	0.2-1.5mm ²		
剥线长度/Strip length	8-9mm		
额定电压/Rated voltage	800V		
额定电流/Rated current	24A		
额定脉冲耐受电压/Rated surge voltage	8KV		
污染等级/Pollution degree	3		
过电压类别/Surge voltage category	III		
UL 额定数据/UL Rated data	B	C	D
额定电流/Rated current	20A	20A	——
额定电压/Rated voltage	600V	600V	——
接线范围/Wire range	28-12AWG		
其他信息/Other information			
塑件/Housing	PA66		
触点材料/Contact	铜合金/Copper alloy		
镀层/Coating	锡/Tin Plated		
阻燃等级/Flame retardant rating	UL94-V0		
使用环境温度/Usage ambient temperature	-25℃ - +70℃		
储存及运输环境温度/Strrage ambient temperature	-40℃ - +85℃		
导轨尺寸/rails Size	SP35X7.5/35X15		
认证/Approval	cPAI [®] us CAC		

订货号	颜色
PART NUMBER	COLOR
254381	灰色 Gray
254382	橙色 Orange
254383	白灰色 Light Gray
254384	蓝色 Blue
254385	黄色 Yellow
254386	绿色 Green
254387	黄绿色 Green-yellow

未标注公差参照GB/T14486												
基本尺寸	0-3	>3-6	>6-10	>10-14	>14-18	>18-24	>24-30	>30-40	>40-50	>50-65	>65-80	>80-100
公差	±0.08	±0.09	±0.10	±0.12	±0.14	±0.16	±0.18	±0.21	±0.24	±0.28	±0.32	±0.36

	Rev. 01	Name 25438X系列正面接线端子(大导轨,SP35) 25438X series through terminal blocks of front-entry(SP35)
单位/Unit mm		