

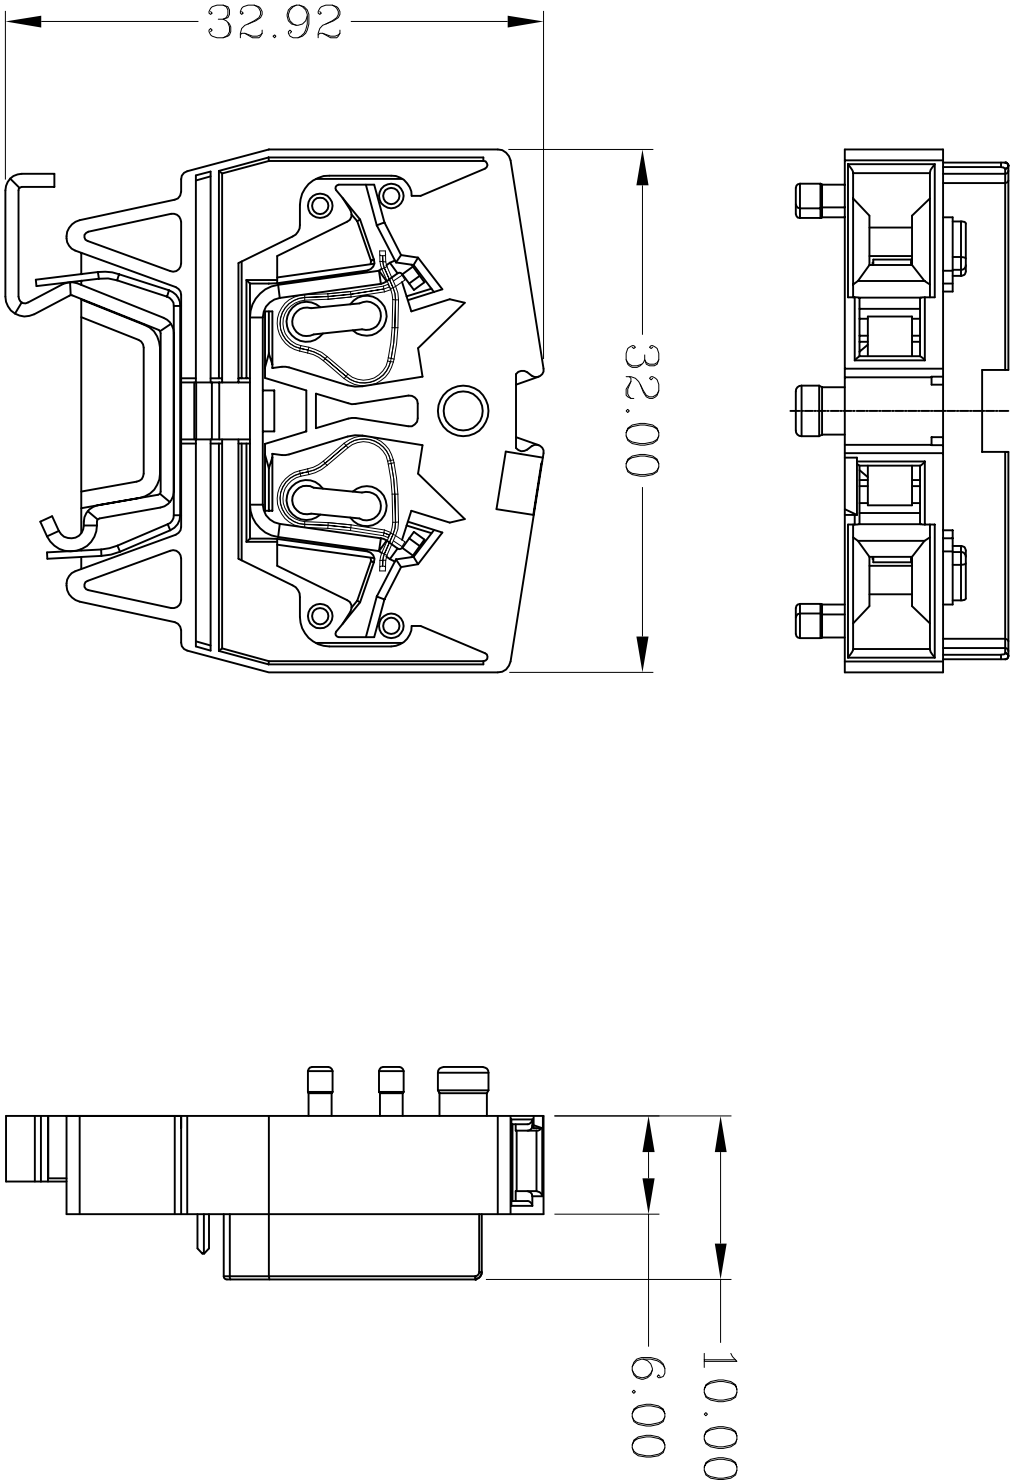


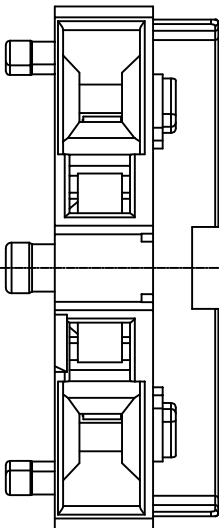
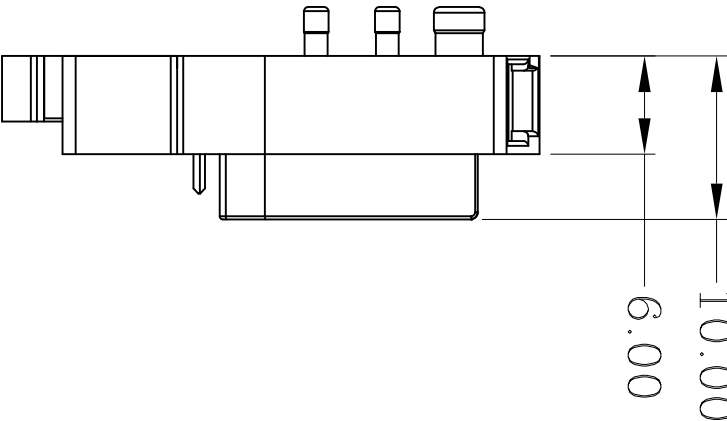
宁波速普电子有限公司

NINGBO SUPU ELECTRONICS.CO.,LTD

产品规格书

Product Specification



				
				
IEC 额定数据/IEC Rated data				
接线范围/Wire range	0.2-2.5mm²			
单股导线/Solid	0.2-2.5mm²			
软导线/Stranded	0.2-2.5mm²			
带端头软导线/Stranded with ferrules without plastic sleeve	0.2-1.5mm²			
带预绝缘端头软导线/Stranded with ferrules with plastic sleeve	0.2-1.5mm²			
剥线长度/Strip length	8-9mm			
额定电压/Rated voltage	800V			
额定脉冲耐受电压/Rated surge voltage	8KV			
污染等级/Pollution degree	3			
过电压类别/Surge voltage category	III			
UL 额定数据/UL Rated data	B	C	D	
额定电压/Rated voltage	600V	600V	—	
接线范围/Wire range	28-12AWG			
其他信息/Other information				
塑件/Housing	PA66			
触点材料/Contact	铜合金/Copper alloy			
镀层/Coating	锡/Tin Plated			
阻燃等级/Flame retardant rating	UL94-V0			
使用环境温度/Usage ambient temperture	-25℃ - +70℃			
储存及运输环境温度/Strrage ambient temperature	-40℃ - +85℃			
导轨尺寸/rails Size	SP15X7.5			
认证/Approval				

订货信息 Order Info			
订货号	颜色	未标注公差参照GB/T14486	
PART NUMBER	COLOR	基本尺寸	公差
254507	黄绿色 Green-yellow	0-3	±0.08
		>3-6	±0.09
		>6-10	±0.10
		>10-14	±0.12
		>14-18	±0.14
		>18-24	±0.16
		>24-30	±0.18
		>30-40	±0.21
		>40-50	±0.24
		>50-65	±0.28
		>65-80	±0.32
		>80-100	±0.36
		>100-120	±0.41
		>120-140	±0.46
			Rev. 01
		单位/Unit	mm
		Name	
		254507正面接地端子（小导轨SP15） 254507 through ground terminal blocks of front-entry(SP15)	