
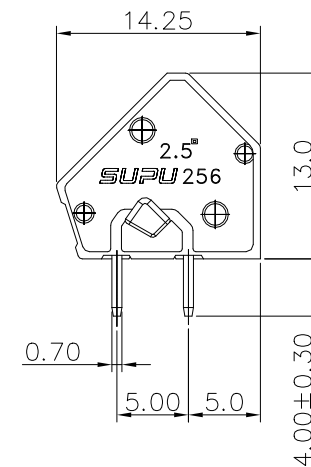


PCB LAYOUT

The diagram shows a rectangular PCB layout with the following dimensions and specifications:

- Overall width: $7.50 \times (P-1)$
- Overall height: 5.00
- Left margin: 3.75
- Internal horizontal spacing: 7.50
- Hole diameter: $\phi 1.10^{+0.1}_{-0}$
- Hole pitch: P
- Internal vertical spacing: 5.00

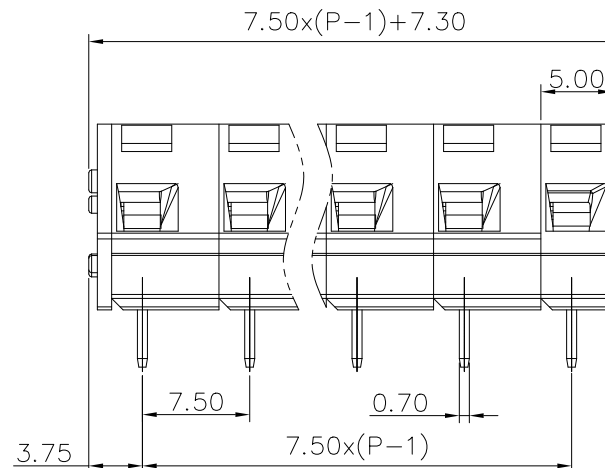

Insulator	PA66	UL94 V-0
Conductor	COPPER ALLOY	Sn,Plated
Spring	Stainless Steel	/

Pitch Range In mm			Nominal Dimension Range In mm				
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	
							0.1/10
							
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
							±2°

1. For Solid wire, peeling wire in right length, push down spring to claptthe wire.
2. For stranded wire, connect directly after peeling in right length, or wire furrled and fix in by pushinathe spring.

Poles:
02:02 contacts
03:03 contacts
...
24:24 contacts

N/A: Grey; 002: Orange;
003: Red; 004: Blue;
005: Yellow; 006: Green;
008: Light Gray

订货号 Order No.	2568XX		名 称 Name	2568XX 系列PCB 电路板用 组合端子排	未注公差 Tolerance	表面 Surface		
项 目 Item	签 字 Signature	日 期 Date			Tolerances Table	VDI21		
设 计 Design	JCY	2024.05.23	图 号 Drawing No.	PRM000765	版本号 Revision Number	重量 Weight	比例 Scale	
审 核 Check	BYH	2024.05.23	材 料 Material	Notes	MO	/	1:1	
工 艺 Process	-	-	物料号 Item No.	/	第1页/共1页 1 of 1	 mm		
标准化 Unify	-	-		...	SUPU 宁波盛普电子有限公司			
批 准 Approve	XJ	2024.05.23		/	NINGBO SUPU ELECTRONICS CO.,LTD.			