





宁波速普电子有限公司
NINGBO SUPU ELECTRONICS.CO.,LTD

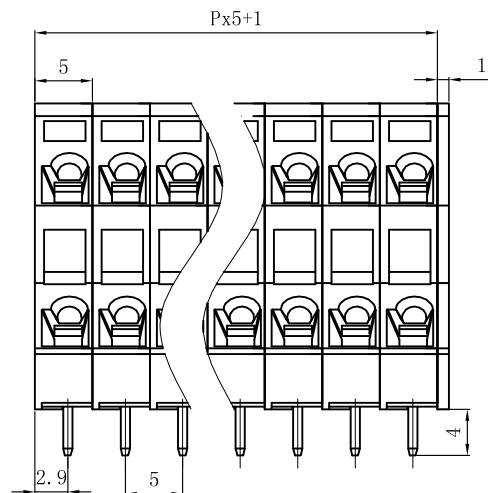


(P为通道数, P=Poles)

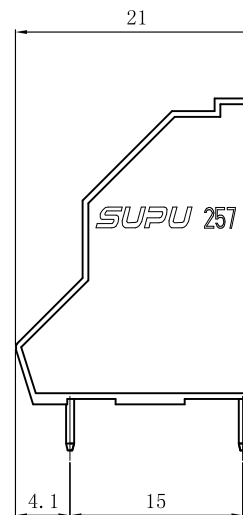

技术数据/ Technical Parameter		IEC	UL
额定电压/Rated voltage	V	250	300
额定电流/Rated current	A	16	15
额定截面/Cross-section	mm ²	0.2-2.5	AWG28-12
额定冲击电压/Rated impulse withstand voltage	KV	4	
阻燃等级/Flammability rating	UL94 V-0		
绝缘材料/Insulating material	Nylon		
接触材料/Metal	铜合金/Copper		
镀层/Plated	镀锡/Tin plated		

订货信息
Order Info

订货号 PART NUMBER	通道数 NO. OF POS	颜色 COLOR
257202	2	灰色 Gray
257203	3	
:	:	
257223	23	
257224	24	

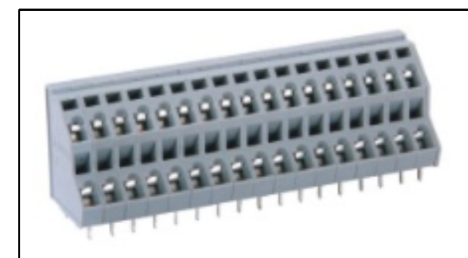

SUPU[®] 宁波速普电子有限公司
NINGBO SUPU ELECTRONICS.CO.,LTD

DWG.	Zhang	2015. 6. 1		Rev.	01
CHK.			Dimension	Sheet	
APP.			mm	1 of 1	

257系列双层5.0mm间距PCB端子排