

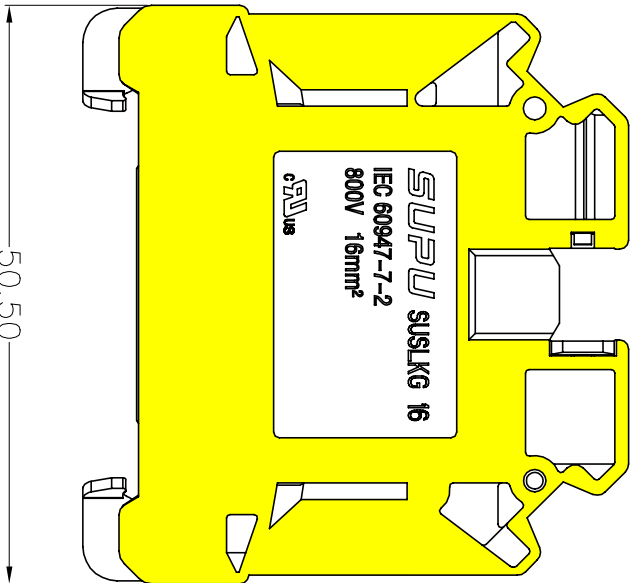


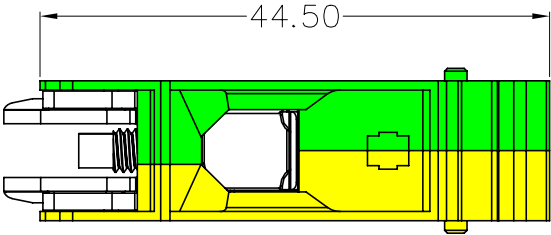

宁波速普电子有限公司

NINGBO SUPU ELECTRONICS.CO.,LTD

产品规格书 Product Specification

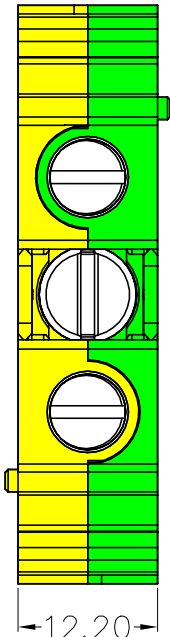

订货信息/Order Info

订货号	颜色	未标注公差参照GB/T14486														
Part Number	Color	基本尺寸	公差	0-3	>3-6	>6-10	>10-14	>14-18	>18-24	>24-30	>30-40	>40-50	>50-65	>65-80	>80-100	>100-120
316993	黄绿/Green-yellow			±0.08	±0.09	±0.10	±0.12	±0.14	±0.16	±0.18	±0.21	±0.24	±0.28	±0.32	±0.36	±0.41

IEC 额定数据/IEC Rated data

接线范围/Wire range	0.2-16mm ²		
单股导线/Solid	0.2-25mm ²		
软导线/Stranded	0.2-16mm ²		
带端头软导线/Stranded with ferrules without plastic sleeve	0.5-16mm ²		
带预绝缘端头软导线/Stranded with ferrules with plastic sleeve	0.5-16mm ²		
剥线长度/Strip length	12-13mm		
额定电压/Rated voltage	800V		
额定脉冲耐受电压/Rated surge voltage	8kV		
污染等级/Pollution degree	3		
过电压类别/Surge voltage category	III		
UL 额定数据/UL Rated data	B	C	
额定电压/Rated voltage	600V	600V	
接线范围/Wire range	10-4AWG		

其他信息/Other information

塑件/Housing	PA66		
触点材料/Contact	铜合金/Copper alloy		
镀层/Coating	镀锡/Tin plated		
阻燃等级/Flame retardant rating	V0		
储存及运输环境温度/Storage ambient temperature	-40℃ - +85℃		
使用环境温度/Usage ambient temperature	-25℃ - +70℃		
螺钉类型/Screw-thread	M5		
扭矩/Tightening torque	2.0-2.5 Nm		
导轨尺寸/rails Size	SP35X7.5/SP35X15		

认证/Approval



单位/Unit	Rev.	Name
mm	01	SUSLKG 16 轨装螺钉接地端子 SUSLKG 16 Rail-mounted ground terminal block with screw clamp