

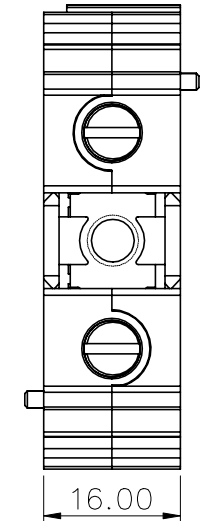


REVISION RECORD			
REV	CN	DESCRIPTION	DRAFT DATE

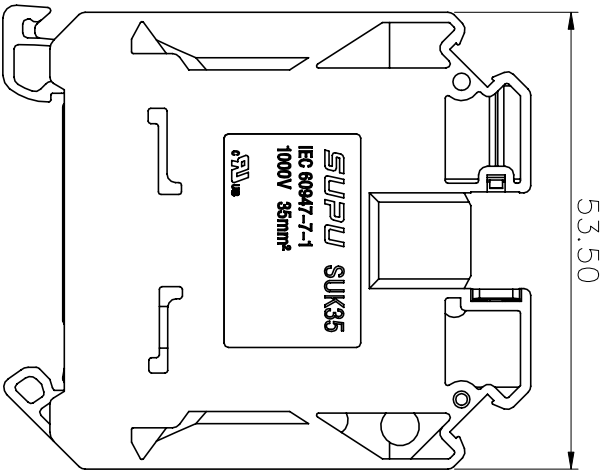

订货号	物料号
335991	411037013
335992	411037014
335994	411037016
335995	411037017
335996	411037018
335997	411037019
335998	411037020

Connection method:
1.For solid wire, peeling wire in right length, fix in by rated torque force.
2.For stranded wire,connect directly after peeling in right length,or furrled on wire and fix in by rated torque force.
(Attention:torque force should be equable, no explosive power.)

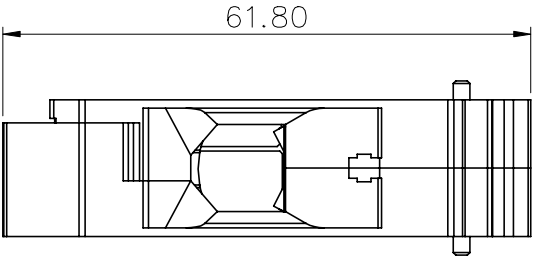

NOTES:
UL/CUL Standard
1.Conductor cross section : 8~1/0AWG
2.Rated torque : M6 , 22.15Lb.in
3.Rated Voltage/Current :
Use group B C D
Rated voltage(V) 600 600
Rated current(A) 150 150

Material:

Insulator	PA66	UL94 V-0
Conductor	Copper alloy	Sn plated
Screw	Steel	Zn plated
Cage	Steel	Zn plated

IEC Standard
1.Conductor cross section :
Wire range(Solid/Stranded) 10-35mm²
Solid 10-35mm²
Stranded 10-35mm²
Stranded with ferrules 10-35mm²
Stranded without plastic sleeve 10-35mm²
Stranded with ferrules 10-35mm²
with plastic sleeve 10-35mm²
2.Rated torque : M6 , 3.0-3.5N •m
3.Rated Voltage/Current :

Surge voltage category	III
Pollution degree	3
Rated surge voltage(KV)	8
Rated voltage(V)	1000
Rated current(A)	125

General information:
1.Dimension shall be interpreted per ASME Y14.5-2009
2.Stripping length : 16-17mm
3.Operating temperature:-40°C~+105°C
4.RoHS Compliance
5.Undimensioned Tolerances:

Pitch Range in mm	Nominal Dimension	Range		
Over 6	Over 10	Over 30	Over 60	Over 100
To 10	To 24	To 30	To 60	To 100
6	10	24	30	60
±0.15	±0.20	±0.30	±0.50	±0.70
±1.00	±1.30	±2.0		

HOW TO ORDER:

33599 X

Sereies No.

Color:
1: Grey
2: Blue
4: Orange
8: Light grey

订货号 Order No.	33599X	名称 Name	SUK35 轨装螺钉	未注公差 Tolerance	表面 Surface
项目 Item	签字 Signature	日期 Date	图号 Drawing No.	版本号 Revision Number	重量 Weight
设计 Design	XCN	10/06/16"	PRM000159	M1	比例 Scale
审核 Check	XJ	10/06/16"	Material		1:1
工艺 Process	-	-	物料号 Item No.		
标准化 Unify	-	-	见附表		
批准 Approve	MX	10/06/16"			