




宁波速普电子有限公司

NINGBO SUPU ELECTRONICS. CO., LTD

产品规格书

Product Specification

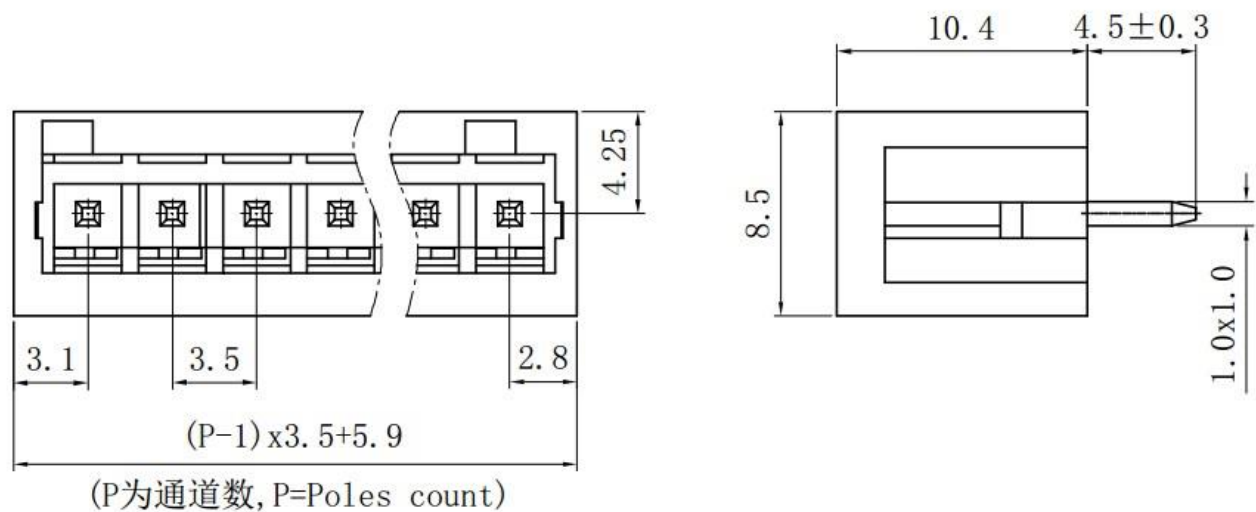

订货信息 Order Info		
订货号/PART NUMBER	通道数/NO. OF POLES	颜色/COLO
435202	2	白灰色 Light Gray
435203	3	
435204	4	
435205	5	
.....		
435212	12	
.....		
435224	24	

未注公差表参照 GB/T14486						
0-3	>3-6	>6-10	>10-14	>14-18	>18-24	
±0.08	±0.09	±0.10	±0.12	±0.14	±0.16	
>24-30	>30-40	>40-50	>50-65	>65-80	>80-100	
±0.18	±0.21	±0.24	±0.28	±0.32	±0.36	
>100-120	>120-140	>140-160	>160-180	>180-200	角度	
±0.41	±0.46	±0.51	±0.56	±0.62	±2°	

IEC 额定数据/IEC Rated data			
接线范围/Wire range	—		
单股导线/Solid	—		
软导线/Stranded	—		
带端头软导线/Stranded with ferrules without plastic sleeve	—		
带预绝缘端头软导线/Stranded with ferrules with plastic sleeve	—		
剥线长度/Strip length	—		
过电压类别/Surge voltage category	III	III	II
污染等级/Pollution degre	3	2	2
额定电压/Rated voltage	160V	160V	320V
额定脉冲耐受电压/Rated surge voltage	2.5KV		
额定电流/Rated current	10A		
UL 额定数据/UL Rated data			
应用组别/Use Group	B	C	D
额定电流/Rated current	10A	—	10A
额定电压/Rated voltage	300V	—	300V
接线范围/Wire range	—		
其他信息/Other information			
塑件/Housing	PA66		
触点材料/Contact	铜合金/Copper Alloy		
镀层/Coating	镀锡/Tin plated		
阻燃等级/Flame retardant rating	UL94 V-0		
使用环境温度/Usage ambient temperture	-40℃～+105℃		
储存及运输环境温度/ Strrage ambient temperature	-40℃～+85℃		
认证/Approval	  		

	Rev. 01	Name 4352xx 系列 2-24 通道针型连接器 4352xx Series 2-24 Poles Staright solder pin
单位/Unit / mm		