


Material:

Insulator	PA66	UL94 V-0
Conductor	COPPER ALLOY	Sn,Plated
Spring	Stainless Steel	/

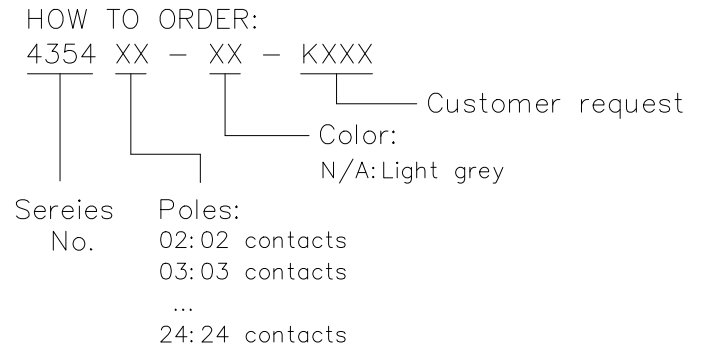

Connection method:

1. For Solid wire, peeling wire in right length, push down spring to clap the wire.
2. For stranded wire, connect directly after peeling in right length, or wire furred and fix in by pushing the spring.

订货号 Order No.	4354XX		名 称 Name	435针型连接器 -防错	未注公差 Tolerance		表面 Surface	
项 目 Item	签 字 Signature	日 期 Date			Tolerance Table		VDI21	
设 计 Design	JCY	2024.07.30	图 号 Drawing No.	PRM000192	版本号 Revision Number	重量 Weight	比例 Scale	
审 核 Check	BYH	2024.07.30	材 料 Material	Notes	M1		1:1	
工 艺 Process	-	-	物料号 Item No.	411093124	第1页/共1页 1 of 1	 mm		
标准化 Unify	-	-		...	SUPU 宁波速普电子有限公司			
批 准 Approve	XJ	2024.07.30		411093146	NINGBO SUPU ELECTRONICS CO.,LTD.			