

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.
未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

借通用件登记
Common Part

原图号
Old Draw. No.





底图总号
Assembly No.

Material:

1

REVISION RECORD

REV	CN	DESCRIPTION	DRFT	DATE

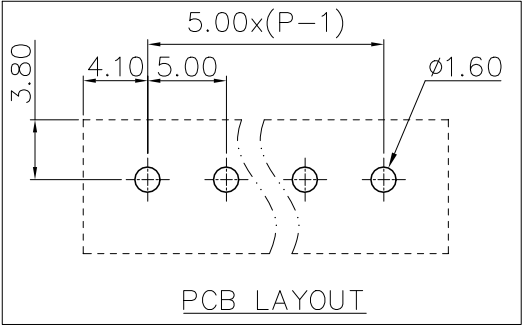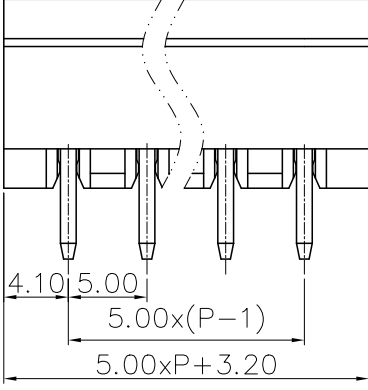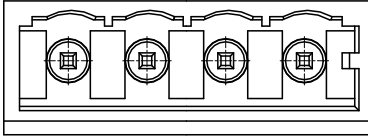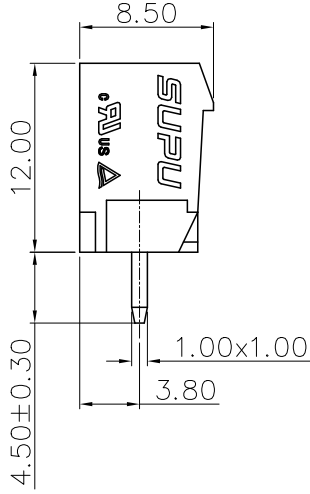

HOW TO ORDER:
4502 XX - XX - KXXX
Series No. Poles:
 02: 02 contacts
 03: 03 contacts
 ...
 24: 24 contacts
 Color: N/A: Grey
 Customer request

NOTES:
UL/CUL Standard

1.Rated Voltage/Current :

Use group	B	C	D
Rated voltage(V)	300	—	300
Rated current(A)	15	—	10

IEC Standard

1.Rated Voltage/Current :

Surge voltage category	III	III	II
Pollution degree	3	2	2
Rated surge voltage(KV)	4.0	4.0	4.0
Rated voltage(V)	320	320	630
Rated current(A)	16	16	16

General information:
1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 5.00mm, Poles : 02~24P
3.Operating temperature: -40°C~+105°C
Wave soldering temperature: 260°C±5°C; time: 5s
4.RoHS Compliance
5.Undimensioned Tolerances:

Pitch Range In mm			Nominal Dimension Range In mm							—	∠
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10	≤		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'			

订货号 Order No.	4502XX		名 称 Name	450针座连接器 -直型	未注公差 Tolerance	表面 Surface	
项目 Item	签 字 Signature	日 期 Date			Tolerance Table	VDI21	
设计 Design	JCY	2024.06.04	图 号 Drawing No.	PRM000434	版本号 Revision Number	重量 Weight	比例 Scale
审核 Check	BYH	2024.06.04	材 料 Material	Notes	M1	1:1	
工 艺 Process	-	-	物料号 Item No.	411098501	第1页/共1页 1 of 1	 mm	
标准化 Unify	-	-		...	SUPU 宁波盛普电子有限公司 NINGBO SUPU ELECTRONICS CO.,LTD.		
批 准 Approve	XJ	2024.06.04		411098523			

2

3

4

5

6

7

8