
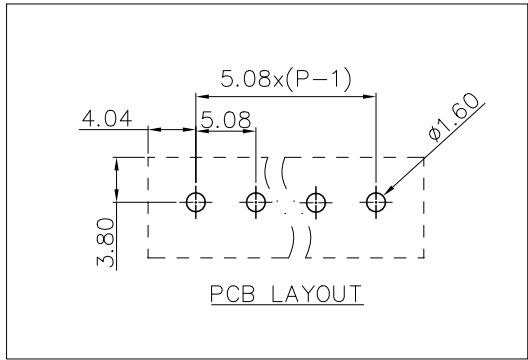




Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.

未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

REVISION RECORD

REV	CN	DESCRIPTION	DRFT	DATE



NOTES:

UL/CUL Standard

1.Rated Voltage/Current :

Use group	B	C	D
Rated voltage(V)	300	—	300
Rated current(A)	15	—	10

IEC Standard

1.Rated Voltage/Current :

Surge voltage category	III	III	II
Pollution degree	3	2	2
Rated surge voltage(KV)	4.0	4.0	4.0
Rated voltage(V)	250	320	630
Rated current(A)	12	12	12

Material:

Insulator	PA66	UL94 V-0
Conductor	COPPER ALLOY	Sn,Plated

General information:

- 1.Dimension shall be interpreted per ASME Y14.5—2009
- 2.Pitch : 5.08mm, Poles : 02~24P
- 3.Operating temperature: -40°C~+105°C
- 4.Wave soldering temperature: 260±5°C, 5 seconds
- 5.RoHS Compliance
- 6.Undimensioned Tolerances:

Pitch Range In mm		Nominal Dimension Range In mm							—	∩	□
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10			
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°			

HOW TO ORDER:

4582 XX -XX - KXXX

- Series No. Color: Customer request
N/A: Orange
Poles:
02: 02 contacts
03: 03 contacts
...
24: 24 contacts

订货号 Order No.	4582XX		名 称 Name	458针座连接器 -直型	未注公差 Tolerance	表面 Surface		
项 目 Item	签 字 Signature	日 期 Date			Tolerances Table	VDI21		
设 计 Design	WYH	2024.05.29	图 号 Drawing No.	PRM000502	版本号 Revision Number	重量 Weight	比例 Scale	
审 核 Check	BYH	2024.05.29	材 料 Material	Notes	M1	/	1:1	
工 艺 Process	-	-	物料号 Item No.	411098701	第1页/共1页 1 of 1	 mm		
标准化 Unify	-	-		...	SUPU 宁波速普电子有限公司 NINGBO SUPU ELECTRONICS CO.,LTD.			
批 准 Approve	XJ	2024.05.29		411098723				