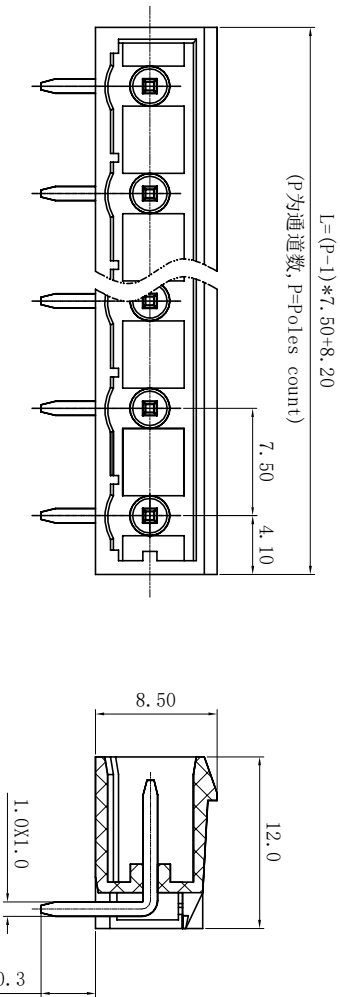


Order Info

订货号 PART NUMBER	通道数 NO. OF POS	颜色 COLOR
475302	2	灰色 Gray
475303	3	
475304	4	
475305	5	
475306	6	
.....		
475324	24	

未注公差参照GB/T14486					
0-3	>3-6	>6-10	>10-14	>14-18	
±0.08	±0.09	±0.10	±0.12	±0.14	
>18-24	>24-30	>30-40	>40-50	>50-65	>65-80
±0.16	±0.18	±0.21	±0.24	±0.28	±0.32
>80-100	>100-120	>120-140	>140-160	>160-180	>180-200
±0.36	±0.41	±0.46	±0.51	±0.56	±0.62
					角度 ±2°

IEC 额定数据/IEC Rated data			
过电压类别/Surge voltage category	III	III	II
污染等级/Pollution degree	3	2	2
额定电压/Rated voltage	500V	630V	1000V
额定脉冲耐受电压/Rated surge voltage	6.0kV	6.0kV	6.0kV
额定电流/Rated current	16A	16A	16A
UL 额定数据/UL Rated data	B	C	D
额定电流/Rated current	15A	15A	—
额定电压/Rated voltage	300V	300V	—
其他信息/Other information			
塑件/Housing	PA66		
触点材料/Contact	铜合金/Copper Alloy		
镀层/Coating	镀锡/Tin plated		
阻燃等级/Flame retardant rating	UL94-V0		
使用环境温度/Usage ambient temperature	-40℃ - +105℃		
IP等级/IP rating	IP20		
认证/Approval	ULus CE A		

		Rev. 01	Name	4753xx 系列2-24位弯型焊针插座 4753xx Series 2-24 Poles right angle pin
单位/Unit	mm			