
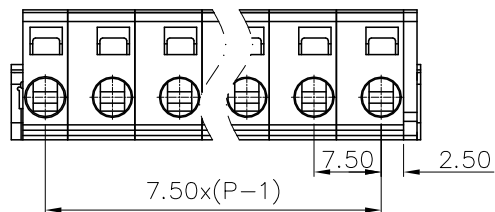
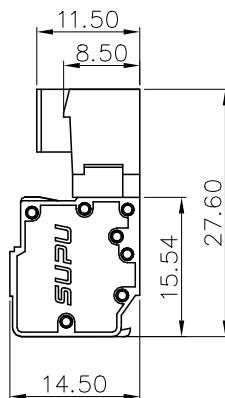


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.
未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

REVISION RECORD

REV	CN	DESCRIPTION	DRFT	DATE

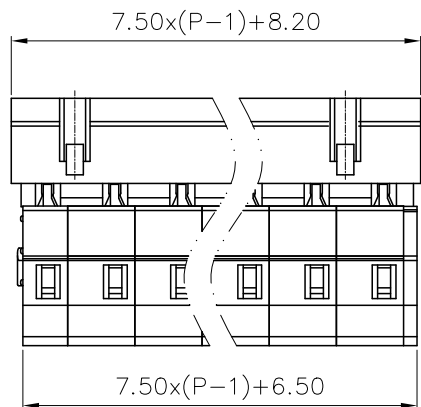

HOW TO ORDER:

4759 XX -XX - KXXX

Customer request
Color:
N/A: Light Gray

Series
No.

Poles:

02: 02 contacts

03: 03 contacts

...

24: 24 contacts

NOTES:

UL/CUL Standard

1. Conductor cross section : 24~14AWG

2. Rated Voltage/Current :

Use group	B	C	D
Rated voltage(V)	300	—	300
Rated current(A)	15	—	10

IEC Standard

1. Conductor cross section : 0.2~2.5mm²

2. Rated Voltage/Current :

Surge voltage category	III	III	II
Pollution degree	3	2	2
Rated surge voltage(KV)	6	6	6
Rated voltage(V)	500	630	1000
Rated current(A)	16	16	16

Material:

Insulator	PA66	UL94 V-0
Conductor	COPPER ALLOY	Sn, Plated
Spring	Stainless Steel	/

General information:

1. Dimension shall be interpreted per

ASME Y14.5-2009

2. Pitch : 7.50mm, Poles : 02~24P

3. Stripping length : 8~9mm

4. Operating temperature: -40°C~+105°C

5. RoHS Compliance

6. Undimensioned Tolerances:

Pitch Range In mm		Nominal Dimension Range In mm							-	∩	□
T0	Over 6	Over 10	Over 30	Over 60	Over 100	Over 150	0.1/10				
6	10	24	30	60	100	150					
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°			

Connection method:

- For Solid wire, peeling wire in right length, push down spring to clasp the wire.
- For stranded wire, connect directly after peeling in right length, or wire furred and fix in by pushing the spring.

订货号 Order No.	4759XX		名称 Name	475针型连接器 -防错	未注公差 Tolerance	表面 Surface	
项目 Item	签字 Signature	日期 Date			Tolerances Table		VDI21
设计 Design	WYH	2024.10.28	图号 Drawing No.	PRM000380	版本号 Revision Number	重量 Weight	比例 Scale
审核 Check	BYH	2024.10.28	材料 Material	Notes	M2	/	1:1
工艺 Process	-	-	物料号 Item No.	411094347	第1页/共1页 1 of 1		mm
标准化 Unify	-	-		...	SUPU 宁波速普电子有限公司 NINGBO SUPU ELECTRONICS CO.,LTD.		
批准 Approve	XJ	2024.10.28		411094369			