

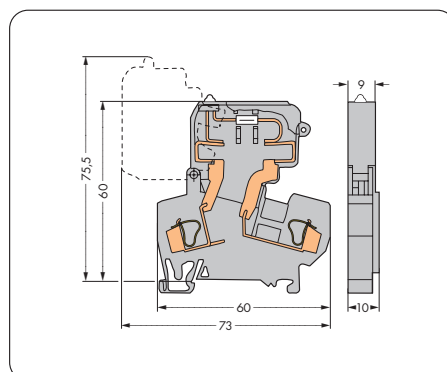


Клеммы с размыкателем и предохранителем с поворотным патроном для предохранителя 4 мм² для плавкой вставки предохранителя 1/4" x 1" мм и 1/4" x 1 1/4" мм, Серия 281

0,08 - 4 мм² 800 В/8 кВ/3 ① ② I_N 10 А AWG 28 - 12 600 В, 10 А  600 В, 10 А  Ширина клеммы 10 мм / 0,394 дюйма  9 - 10 мм / 0,37 дюйма ③	0,08 - 4 мм² 800 В/8 кВ/3 ① ② I_N 10 А AWG 28 - 12 15 В, 10 А  15 В, 10 А  Ширина клеммы 10 мм / 0,394 дюйма  9 - 10 мм / 0,37 дюйма ③	0,08 - 4 мм² 800 В/8 кВ/3 ① ② I_N 10 А AWG 28 - 12 110 В, 10 А  110 В, 10 А  Ширина клеммы 10 мм / 0,394 дюйма  9 - 10 мм / 0,37 дюйма ③
---	--	---

[illegible]

Габаритные размеры в мм