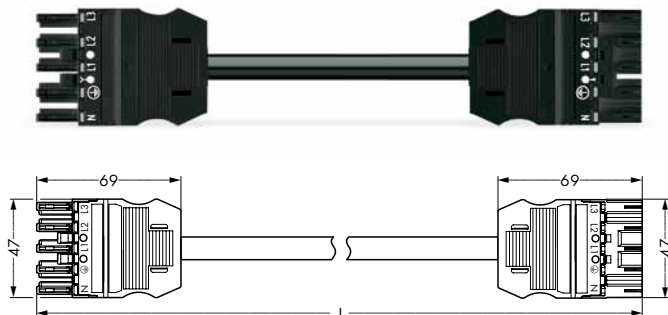
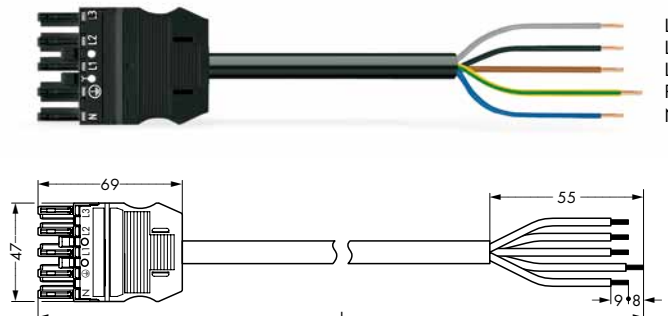
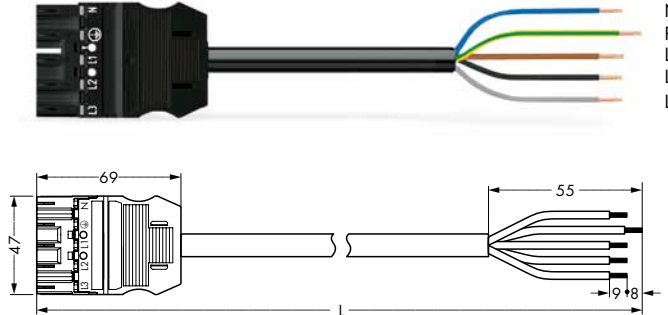


		PVC H05VV-F 5G2.5 halogen-free H05Z1 Z1-F 5G2.5 400 V/6 kV/3 I _N 20 A Conductor ends, bonded: 9 mm 1 Approvals				
Interconnecting cable, socket – plug		Length	Item No. black	Item No. white	Item No. black	Item No. white
		● ○ Coding A PVC halogen-free				
		1 m	771-9995/007-101	.../007-102	771-9995/017-101	.../017-102
		2 m	771-9995/007-201	.../007-202	771-9995/017-201	.../017-202
		3 m	771-9995/007-301	.../007-302	771-9995/017-301	.../017-302
		5 m	771-9995/007-501	.../007-502	771-9995/017-501	.../017-502
		7 m	771-9995/007-701	.../007-702	771-9995/017-701	.../017-702
Connecting cable, socket – free end		Length	Item No. black	Item No. white	Item No. black	Item No. white
		● ○ Coding A PVC halogen-free				
		1 m	771-9995/107-101	.../107-102	771-9995/117-101	.../117-102
		2 m	771-9995/107-201	.../107-202	771-9995/117-201	.../117-202
		3 m	771-9995/107-301	.../107-302	771-9995/117-301	.../117-302
		5 m	771-9995/107-501	.../107-502	771-9995/117-501	.../117-502
		7 m	771-9995/107-701	.../107-702	771-9995/117-701	.../117-702
Connecting cable, plug - free end		Length	Item No. black	Item No. white	Item No. black	Item No. white
		● ○ Coding A PVC halogen-free				
		1 m	771-9995/207-101	.../207-102	771-9995/217-101	.../217-102
		2 m	771-9995/207-201	.../207-202	771-9995/217-201	.../217-202
		3 m	771-9995/207-301	.../207-302	771-9995/217-301	.../217-302
		5 m	771-9995/207-501	.../207-502	771-9995/217-501	.../217-502
		7 m	771-9995/207-701	.../207-702	771-9995/217-701	.../217-702
Info		Accessories				
1 For "International Certification Organizations" and "Approvals – User Guide," see pages 240 to 243. Marine approvals (GL, LR, NV) relate exclusively to cables approved for marine applications. For other cables, please contact factory. ● black ○ white ● blue Coding A Coding A Coding I (N 3 L1 L2 L3) (N 3 L1 L2 L3) (N ⊕ L DA- DA+) For coding information, see pages 224 to 226. Fire load data available upon request.		Locking lever, for "flying leads," manually operated				
			black	770-101	100 (4x25)	
			white	770-121	100 (4x25)	
		Locking lever, for "flying leads," tool operated				
			black	770-111	100 (4x25)	
			white	770-131	100 (4x25)	
		Lockout cap, for socket, separable, 12-pole				
			black	770-201	100	
			white	770-221	100	
		Lockout cap, for plug, separable, 5-pole				
	yellow	770-360	100			

1 For "International Certification Organizations" and "Approvals – User Guide," see pages 240 to 243. Marine approvals (GL, LR, NV) relate exclusively to cables approved for marine applications.

For other cables, please contact factory.

● black Coding A (N 3 L1 L2 L3)
○ white Coding A (N 3 L1 L2 L3)
● blue Coding I (N ⊕ L DA- DA+)

For coding information, see pages 224 to 226.
Fire load data available upon request.

Recommended items are shown in red and available for immediate delivery!