

0.25 – 1.5 mm ² ① 250 V/4 kV/3 I _N 16 A	AWG 22 – 16	0.25 – 1.5 mm ² ① 250 V/4 kV/3 I _N 16 A	AWG 22 – 16	Snap-on type strain relief housings for: - 3-pole sockets - 3-pole plugs
 9 mm / 0.35 in		 9 mm / 0.35 in		
② Approvals		② Approvals		



Color	Item No.	Pack. Unit	Color	Item No.	Pack. Unit	Color	Item No.	Pack. Unit
Socket without strain relief housing			Plug without strain relief housing			Strain relief housing, for 4.5 – 10 mm cable diameter		
● black	890-203	50	● black	890-213	50	black	890-503	50
○ white	890-223	50	○ white	890-233	50	white	890-513	50




Item-Specific Accessories

Operating tool, insulated 3-pole 	890-393	1	Operating tool, insulated 3-pole 	890-393	1	Shield connecting plate, for plugs and sockets 	890-523	50

Accessories, 890 Series

Locking lever, for "flying leads," tool operated  black 890-111 100 (2x50) white 890-131 100 (2x50)	Locking lever, for "flying leads," tool operated  black 890-111 100 (2x50) white 890-131 100 (2x50)	
Mounting carrier, for 2- to 5-pole "flying leads"  black 890-310 100 white 890-311 100	Mounting carrier, for 2- to 5-pole "flying leads"  black 890-310 100 white 890-311 100	

Dimensions

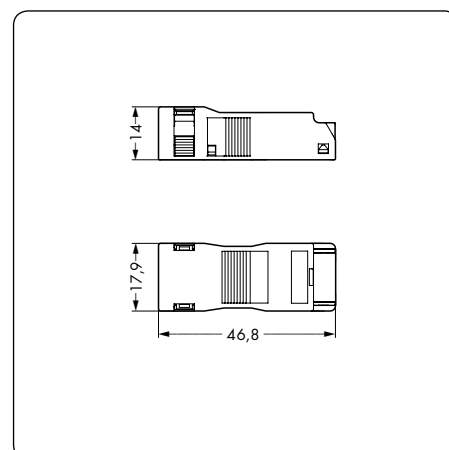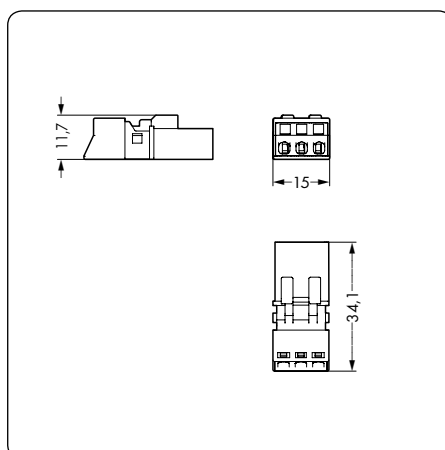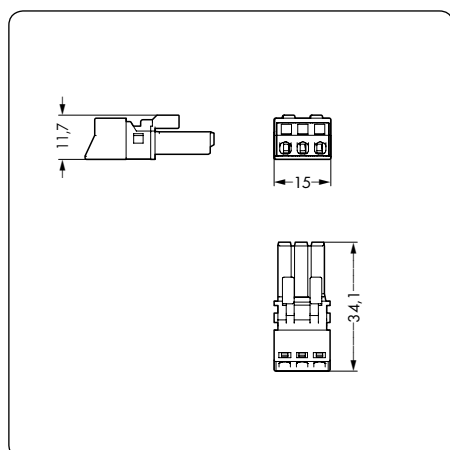

WINSTA® - Perfectly plugged!