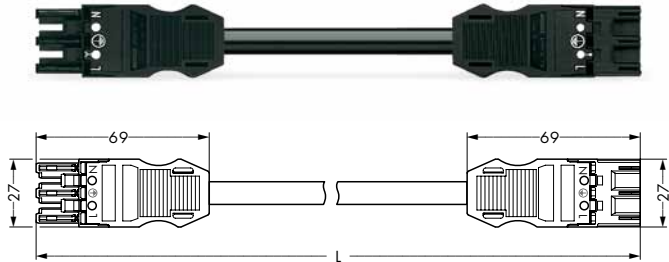
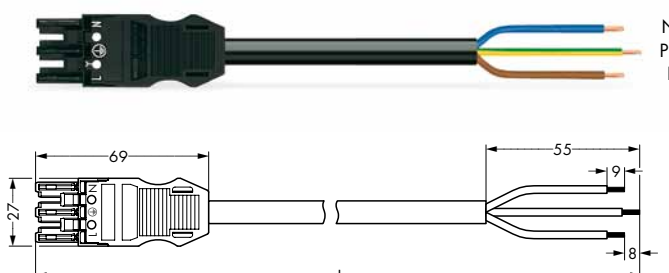
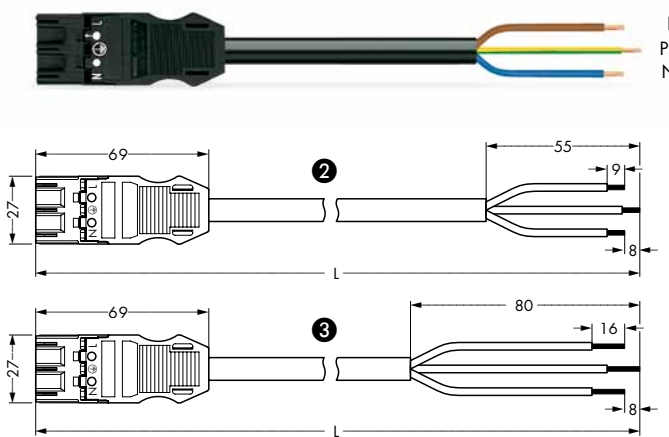


		PVC halogen-free H05VV-F 3G1.5 H05Z1Z1-F 3G1.5 250 V/4 kV/3 I _N 16 A Conductor ends, bonded: 9 mm/16 mm ① Approvals				
Interconnecting cable, socket – plug		Length	Item No. black	Item No. white	Item No. black	Item No. white
		● ○ Coding A PVC halogen-free				
		1 m	771-9993/006-101	.../006-102	771-9993/016-101	.../016-102
		2 m	771-9993/006-201	.../006-202	771-9993/016-201	.../016-202
		3 m	771-9993/006-301	.../006-302	771-9993/016-301	.../016-302
		5 m	771-9993/006-501	.../006-502	771-9993/016-501	.../016-502
		7 m	771-9993/006-701	.../006-702	771-9993/016-701	.../016-702
Connecting cable, socket – free end		Length	Item No. black	Item No. white	Item No. black	Item No. white
		● ○ Coding A PVC halogen-free				
		1 m	771-9993/106-101	.../106-102	771-9993/116-101	.../116-102
		2 m	771-9993/106-201	.../106-202	771-9993/116-201	.../116-202
		3 m	771-9993/106-301	.../106-302	771-9993/116-301	.../116-302
		5 m	771-9993/106-501	.../106-502	771-9993/116-501	.../116-502
		7 m	771-9993/106-701	.../106-702	771-9993/116-701	.../116-702
Connecting cable, plug – free end		Length	Item No. black	Item No. white	Item No. black	Item No. white
		● ○ Coding A ② PVC halogen-free				
		1 m	771-9993/206-101	.../206-102	771-9993/216-101	.../216-102
		2 m	771-9993/206-201	.../206-202	771-9993/216-201	.../216-202
		3 m	771-9993/206-301	.../206-302	771-9993/216-301	.../216-302
		5 m	771-9993/206-501	.../206-502	771-9993/216-501	.../216-502
		7 m	771-9993/206-701	.../206-702	771-9993/216-701	.../216-702
		● Coding A ③ (for installation of switches and outlets)				
		1 m	771-9993/3206-101		771-9993/3216-101	
		2 m	771-9993/3206-201		771-9993/3216-201	
		3 m	771-9993/3206-301		771-9993/3216-301	
		5 m	771-9993/3206-501		771-9993/3216-501	
		7 m	771-9993/3206-701		771-9993/3216-701	
Info		Accessories				
① For “International Certification Organizations” and “Approvals – User Guide,” see pages 240 to 243. Marine approvals (GL, LR, NV) relate exclusively to cables approved for marine applications. For other cables, please contact factory. ● black Coding A (L ⊕ N) ○ white Coding A (L ⊕ N) ● red Coding P (L ⊕ N) For coding information, see pages 224 to 226. Fire load data available upon request.		Locking lever, for “flying leads,” manually operated				
				black	770-101	100 (4x25)
				white	770-121	100 (4x25)
		Locking lever, for “flying leads,” tool operated				
				black	770-111	100 (4x25)
				white	770-131	100 (4x25)
		Lockout cap, for socket, separable, 12-pole				
				black	770-201	100
				white	770-221	100
		Lockout cap, for plug, separable, 5-pole				
		yellow	770-360	100		