

	Type	Ref. No.	Lampholder thickness (mm)	Spring adjustment	T-Marking	Starter attachment	Top-Test function	Push-in terminals	Drawing	Weight g	Unit pcs.
new>>	49105	537166*	13	—	T140	—	—	base	A	5.1	1000
new>>	49106	537167*	13	•	T140	—	—	base	B	5.9	1000
new>>	59105	537182*	13	—	T140	—	•	lateral	C	5	1000
new>>	59106	537183*	13	•	T140	—	•	lateral	D	5	1000
new>>	49505	537174*	9.5	—	T140	—	—	base	A	5	1000
new>>	49506	537175*	9.5	•	T140	—	—	base	B	5.5	1000
new>>	59505	537206*	9.5	—	T140	—	•	lateral	C	4.8	1000
new>>	59506	537207*	9.5	•	T140	—	•	lateral	D	4.8	1000
	47205	101712	13	—	T130	•	—	base	E	9	1000
	47206	101716	13	•	T130	•	—	base	F	9.5	1000
	47605	101769	9.5	—	T130	•	—	base	E	8	1000
	47606	101773	9.5	•	T130	•	—	base	F	8.5	1000

* Rotoclic

G13 built-in lampholders for lamps T8

For the automatic luminaire wiring

Casing: PC, white, rotor: PBT GF, white, T130

Nominal rating: 2/500, lampholder thickness: 10.5 mm, IDC terminals for leads H05V-U 0.5

Rear split pins for wall thickness up to 1.2 mm


Weight: 5/5.5 g, unit: 1000 pcs.

Type: 48205

Ref. No.: 507133

Type: 48206 with spring adjustment

Ref. No.: 507134

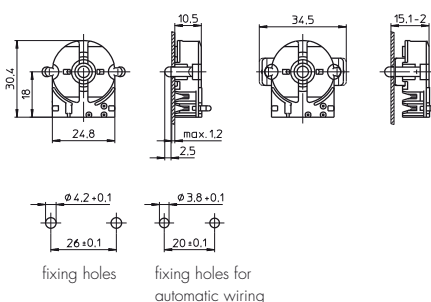

G13 built-in lampholder for lamps T8 and T12

Lampholder thickness: 10.7 mm

Casing: PC, white, rotor: PBT GF, white, T130

Nominal rating: 2/500


Push-in terminals: 0.5–1 mm²

Lateral fixing clips

Weight: 4.7 g, unit: 1000 pcs.

Type: 47504

Ref. No.: 101745



G13 lampholder

For push-fitting onto lamps T12

Lampholder thickness: 9.5 mm

Casing: PC, white, T110

Front cover plate: PBT GF, white

Nominal rating: 2/250

Push-in terminals: 0.5–1 mm²

Fixing holes for screws M3

Weight: 10.5 g, unit: 1000 pcs.

Type: 47700

Ref. No.: 101781

