


Wiring inserts with push-fit foot  
 For G13 twin lampholders 108773/108775  
 Material: PC, white  
 Push-in terminals: 0.5 mm<sup>2</sup>  
 For the automatic luminaire wiring:  
 IDC terminals for leads H05V-U 0.5  
 Weight: 5.3 g, unit: 500 pcs.  
 Type: 22850/22851

**Ref. No.: 108777** with stop  
**Ref. No.: 108778** without stop




## G13 Built-in Lampholders

### For fluorescent lamps T8 (T26), T12 (T38)

Pin support for reliable contact  
 (except for type 485)  
 Lampholders with integrated starter holder  
 are equipped with big rotor and have  
 push-in twin terminals for the lamp circuit and  
 push-in terminals for the starter circuit.  
 Max. permitted temperature  $T_m$   
 on the rear side of the lampholder: 110 °C  
 T-Marking acc. to IEC

G13 built-in lampholders for lamps T8 and T12  
 Casing: PC, white, frontplate: PBT GF, white  
 Nominal rating: 2/500  
 Push-in terminals: 0.5–1 mm<sup>2</sup>  
 Rear split pins for wall thickness up to 1.2 mm  
 (Type 471 and 475)

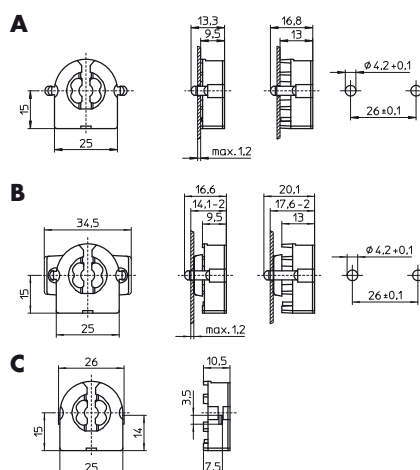

| Type  | Ref. No.      | Lampholder thickness (mm) | Spring adjustment | T-Marking | Drawing | Weight g | Unit pcs. |
|-------|---------------|---------------------------|-------------------|-----------|---------|----------|-----------|
| 47105 | <b>509152</b> | 13                        | —                 | T140      | A       | 4.6      | 1000      |
| 47106 | <b>509154</b> | 13                        | •                 | T140      | B       | 5.4      | 1000      |
| 47505 | <b>509162</b> | 9.5                       | —                 | T140      | A       | 4.4      | 1000      |
| 47506 | <b>509164</b> | 9.5                       | •                 | T140      | B       | 5.1      | 1000      |
| 47304 | <b>509156</b> | 10.5                      | —                 | T140      | C       | 4.2      | 1000      |