

INTEGRIKA



IP65



УХЛ4



ПКТ
апэ

BS-9611-2x18					~220				1,81			
BS-7611-1x18					~220				1,69			
BS-1610-1x18					220				1,39			
BS-1610-2x18					220				1,51			
BS-1610-1x18 DALI					220				1,49			
BS-1610-2x18 DALI					220				1,61			

BS-9611-2x20 T8 LED				~220			2,42				
		3100 3100				M1					
				0,34							
BS-1610-1x20 T8 LED				220			1,37				
		1550 1550				M1					
				0,13							
BS-1610-2x20 T8 LED				220			2,12				
		3100 3100				M1					
				0,26							
BS-1610-1x24 T5				220			1,09				
		1750 1750				M1					
				0,10							
BS-1610-2x24 T5				220			1,10				
		3500 3500				M1					
				0,20							
BS-1610-1x24 T5 DALI				~220			1,19	DALI			
		1750 1750				M1					
				0,11							
BS-1610-2x24 T5 DALI				~220			1,20	DALI			
		3500 3500				M1					
				0,21							
BS-9611-2x36				~220			2,82				
		116 3310				M1					
				0,42							
BS-9613-2x36				~220			3,22				
		260 3310				M1					
				0,42							
BS-7611-1x36				~220			2,07				
		160 1655				M1					
				0,27							
BS-7613-1x36				~220			2,47				
		160 1655				M1					
				0,27							


BS-1610-1x36				220			1,77				
						M1					
BS-1610-2x36				220			2,52				
						M1					
BS-1610-1x36 DALI				220			1,87	DALI			
						M1					
BS-1610-2x36 DALI				220			2,62	DALI			
						M1					
BS-9613-2x36 DALI				~220			3,32	DALI			
						M1					
BS-7613-1x36 DALI				~220			2,57	DALI			
						M1					
BS-9613-2x36 Z-BUS				~220			3,32	Z-BUS			
						M1					
BS-7613-1x36 Z-BUS				~220			2,57	Z-BUS			
						M1					
BS-1610-1x54 T5				220			1,41				
						M1					
BS-1610-2x54 T5				220			1,51				
						M1					
BS-1610-1x54 T5 DALI				~220			1,51	DALI			
						M1					

BS-1610-2x54 T5 DALI				~220			1,61	DALI			
				0,51		M1					
BS-7613-1x54 T5 DALI				~220		NiCd	2,31	DALI			
				0,22		M1					
BS-7613-2x54 T5 DALI				~220		NiCd	2,41	DALI			
				0,53		M1					
BS-9613-1x54 T5 Z-BUS				~220		NiCd	2,51	Z-BUS			
				0,22		M1					
BS-9613-2x54 T5 Z-BUS				~220		NiCd	2,61	Z-BUS			
				0,53		M1					
BS-9611-2x58				~220		NiCd	4,00				
				0,35		M1					
BS-9613-2x58				~220		NiCd	3,28				
				0,60		M1					
BS-7611-1x58				~220		NiCd	2,89				
				0,35		M1					
BS-7613-1x58				~220		NiCd	3,29				
				0,60		M1					
BS-1610-1x58				220			2,59				
				0,25		M1					
BS-1610-2x58				220			3,71				
				0,50		M1					

BS-1610-1x58 DALI				220			2,69	DALI			
		4150 4150				M1	1				
BS-1610-2x58 DALI				220			3,81				
		8300 8300				M1	1				
BS-7613-1x58 DALI				~220			3,39	DALI			
		290 4150				M1	1				
BS-9613-2x58 DALI				~220			4,51	DALI			
		580 8300				M1	1				
BS-7613-1x58 Z-BUS				~220			3,39	Z-BUS			
		290 4150				M1	1				
BS-9613-2x58 Z-BUS				~220			4,51	Z-BUS			
		580 8300				M1	1				
BS-1610-1x80 T5				220			1,68				
		6150 6150				M1	1				
BS-1610-2x80 T5				220			1,92				
		12300 12300				M1	1				
BS-1610-1x80 T5 DALI				~220			1,78	DALI			
		6150 6150				M1	1				
BS-1610-2x80 T5 DALI				~220			2,02	DALI			
		12300 12300				M1	1				
BS-7613-1x80 T5 DALI				~220			2,58	DALI			
		6150 6150				M1	1				

BS-7613-2x80 T5 DALI				~220				DALI			
BS-9613-1x80 T5 Z-BUS				~220				Z-BUS			
BS-9613-2x80 T5 Z-BUS				~220				Z-BUS			

Кол-во и мощность источников света	Размеры, мм		
	L	B	H
1x36, 1x20 LED	1271	66	115
2x18	661	117	115
2x36,2x20 LED	1271	117	115
2x58	1571	117	115

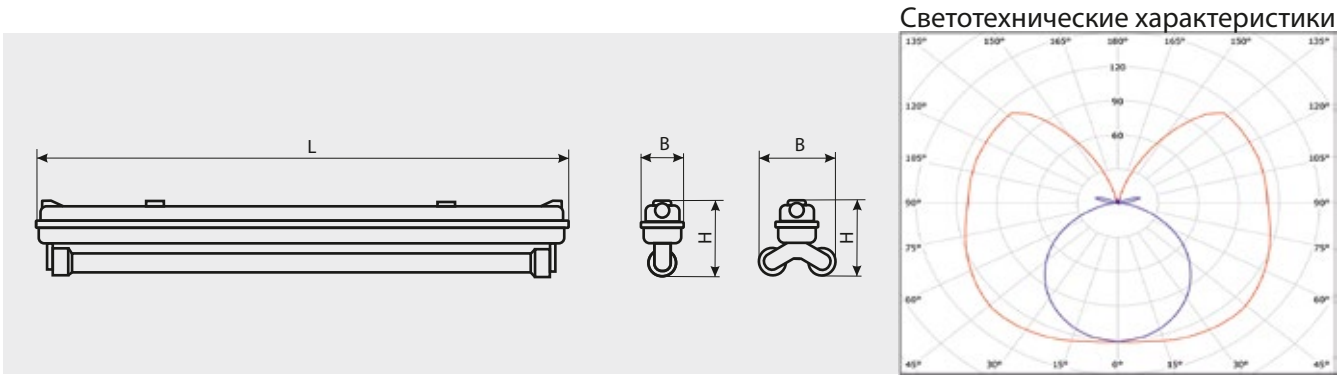

Пример для заказа:
Аварийный светильник BS-1610-1x36 - 10шт.
Защитная трубка - 20шт.