

AURORIS

IP54



УХЛ4



ПКТ
ПКТ

BS-4170-4x0,5 INEXI SNEL LED*



30 95 44 0,15 M1 1 0,95



* - функционирует только при подключении к светильнику «master» или INEXI BOX

BS-1170-4x0,5 BSG-24 LED



95 95 44 0,10 M1 1 1,00 24



BS-1170-4x0,5 LED (=24 B)



95 95 44 0,10 M1 1 1,00



BS-1170-1x9



260 260 44 0,08 2G7 M1 1 1,10




BS-1170-2x9




515 515 44 0,08 2G7 M1 1




Габаритные размеры



Светотехнические характеристики

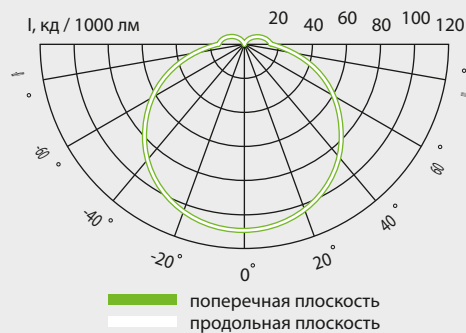

Эвакуационные знаки

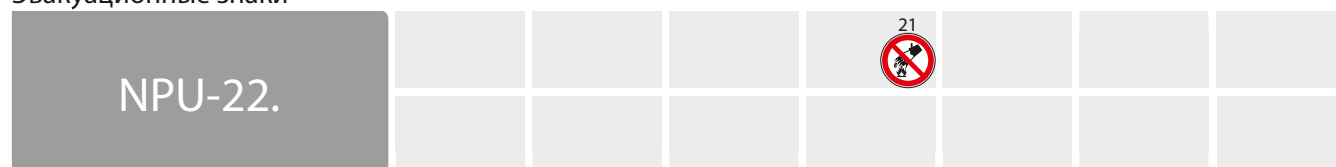

Пример для заказа:

Аварийный светильник BS-1170-1x9 - 10 шт.

NPU-22.21 «водой не тушить» - 10 шт.