

CORVET



IP65




УХЛ
3.1

EAC



ССО
СТП

BS-9683-2x54



BS-9683-4x54



BS-1680-2x54



BS-1680-4x54



BS-1680-2x54 BSE3




BS-1680-4x54 BSE3



BS-1680-2x54 DALI				220			7,50	DALI			
		6500 6500				M1					
BS-1680-4x54 DALI				220			12,0	DALI			
		13000 13000				M1					
BS-9683-2x54 DALI				~220			9,60	DALI			
		256 6500				M1					
BS-9683-4x54 DALI				~220			14,1	DALI			
		512 13000				M1					
BS-9683-2x54 Z-BUS				~220			9,60	Z-BUS			
		256 6500				M1					
BS-9683-4x54 Z-BUS				~220			14,1	Z-BUS			
		512 13000				M1					
BS-9683-2x80				~220			11,1				
		177 8850				M1					
BS-9683-4x80				~220			16,1				
		354 17700				M1					
BS-1680-2x80				220			9,00				
		8850 8850				M1					
BS-1680-4x80				220			14,0				
		17700 17700				M1					
BS-1680-2x80 BSE3				220			9,00	BSE3			
		8850 8850				M1					

BS-1680-4x80 BSE3				220			14,0	BSE3				
						M1						
				1,53								
BS-1680-2x80 DALI				220			9,00	DALI				
						M1						
				0,76								
BS-1680-4x80 DALI				220			14,0	DALI				
						M1						
				1,53								
BS-9683-2x80 DALI				~220			11,1	DALI				
						M1						
				0,84								
BS-9683-4x80 DALI				~220			16,1	DALI				
						M1						
				1,61								
BS-9683-2x80 Z-BUS				~220			11,1	Z BUS				
						M1						
				0,84								
BS-9683-4x80 Z-BUS				~220			16,1	Z BUS				
						M1						
				1,61								

Габаритные размеры

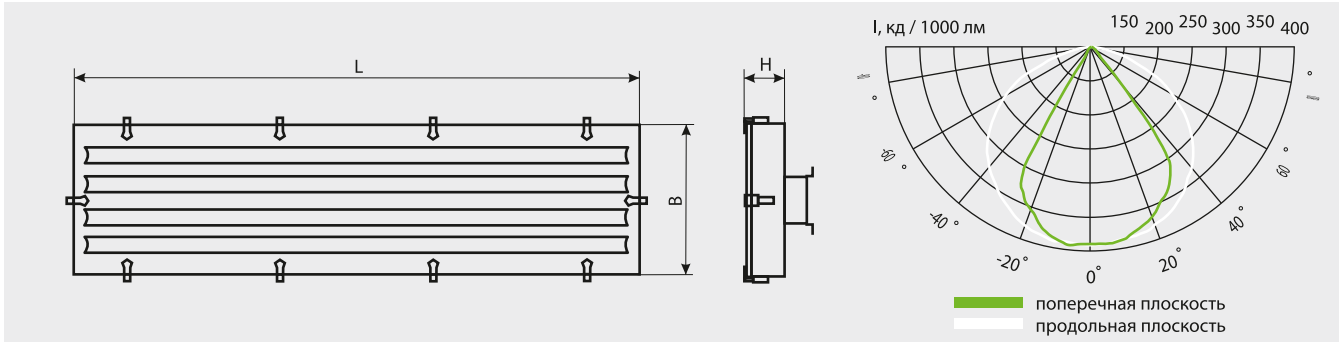

Кол-во и мощность источников света	Размеры, мм		
	L	B	H
2x54	1210	190	82
2x80	1510	190	82
4x54	1210	345	82
4x80	1510	345	82

Пример для заказа:
Аварийный светильник BS-9683-2x54 - 10 шт.