

GALANTHUS



IP50



УХЛ4

EAC



ПММ
СТП

BS-1200-2x18



220

2G11

1,40



1440
1440



M1



BS-9201-2x24



~220

2G11

NiCd

2,60



97
2160



M1



BS-9203-2x24



~220

2G11

NiCd

2,90



97
2160



M1



BS-9205-2x24



~220

2G11

NiCd

2,90



97
2160



M1



BS-1200-2x24



220

2G11

2,10



2160
2160



M1



BS-1200-2x24 BSE3



220

2G11

2,10

BSE3



2160
2160




M1




BS-1200-2x24 DALI				220			2,10	DALI			
		2160 2160				M1					
BS-9201-2x24 DALI				~220			2,60	DALI			
		226 2160				M1					
BS-9203-2x24 DALI				~220			2,90	DALI			
		151 2160				M1					
BS-9201-2x24 Z-BUS				~220			2,60	Z-BUS			
		226 2160				M1					
BS-9203-2x24 Z-BUS				~220			2,90	Z-BUS			
		226 2160				M1					
BS-9201-2x36				~220			2,60				
		105 3530				M1					
BS-9203-2x36				~220			2,90				
		105 3530				M1					
BS-1200-1x36				220			1,30				
		1770 1770				M1					
BS-1200-2x36				220			2,10				
		3530 3530				M1					
BS-1200-2x36 BSE3				220			2,10	BSE3			
		3530 3530				M1					
BS-1200-2x36 DALI				220			2,10	DALI			
		3530 3530				M1					

BS-9201-2x36 DALI				~220			2,60	DALI			
		265 3530				M1					
BS-9203-2x36 DALI				~220			2,90	DALI			
		158 3530				M1					
BS-9201-2x36 Z-BUS				~220			2,60	Z BUS			
		265 3530				M1					
BS-9203-2x36 Z-BUS				~220			2,90	Z BUS			
		158 3530				M1					

Габаритные размеры

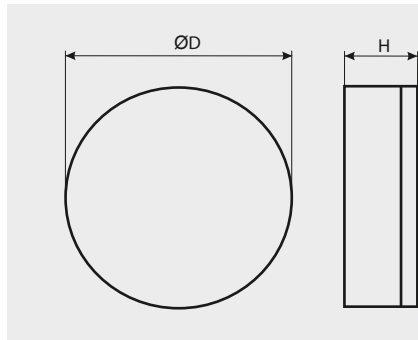

Светотехнические характеристики

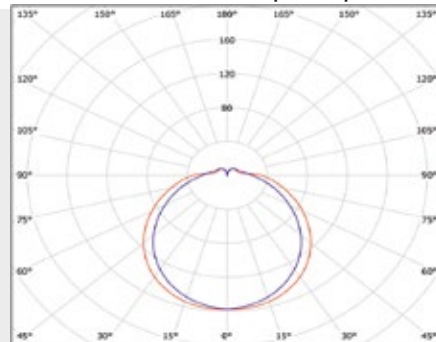

Кол-во и мощность источников света	Размеры, мм	
	D	H
1x36, 2x18	350	110
2x24, 2x36	450	120

Пример для заказа:

Аварийный светильник BS-1200-2x36 - 50 шт.