

SUBMARINE



IP65





УХЛ4

EAC




CCO
HCT


BS-9743-2x10 T8 LED




BS-1740-2x10 T8 LED




BS-9741-2x18 T8




BS-9743-2x18 T8



BS-9743-2x18 EP




BS-1740-2x18 T8




BS-1740-2x18 EP				220			4,90				
		1500 1500				M1					
BS-1740-2x18 T8 DALI				220			4,90	DALI			
		1500 1500				M1					
BS-9743-2x18 T8 DALI				~220		Nicd	5,80	DALI			
		150 1500				M1					
BS-9743-2x18 T8 Z-BUS				~220		Nicd	5,70	Z-BUS			
		150 1500				M1					
BS-9741-2x20 T8 LED				~220		NiMg	9,00				
		1500 3000				M1					
BS-7741-2x20 T8 LED				~220		NiMg	12,2				
		3000 3000				M1					
BS-1740-2x20 T8 LED				220			9,00				
		3000 3000				M1					
BS-9741-2x36 T8				~220		Nicd	9,40				
		116 3310				M1					
BS-9743-2x36 T8				~220		Nicd	9,60				
		116 3310				M1					
BS-9741-2x36 EP				~220		Nicd	9,30				
		210 4600				M1					
BS-9743-2x36 EP				~220		Nicd	9,50				
		210 4600				M1					

BS-1740-2x36 T8				220			9,00				
						M1					
				0,32							
BS-1740-2x36 EP				220			9,00				
						M1					
				0,32							
BS-1740-2x36 T8 DALI				220			9,00	DALI			
						M1					
				0,32							
BS-9743-2x36 T8 DALI				~220			9,70	DALI			
						M1					
				0,40							
BS-9743-2x36 T8 Z-BUS				~220			9,60	Z BUS			
						M1					
				0,36							
BS-9741-2x58 T8				~220			11,0				
						M1					
				0,50							
BS-9743-2x58 T8				~220			12,0				
						M1					
				0,50							
BS-1740-2x58 T8				220			12,9				
						M1					
				0,50							
BS-1740-2x58 T8 DALI				~220			11,0	DALI			
						M1					
				0,50							
BS-9743-2x58 T8 DALI				~220			13,0	DALI			
						M1					
				0,50							
BS-9743-2x58 T8 Z-BUS				~220			13,0	Z BUS			
						M1					
				0,50							

Габаритные размеры

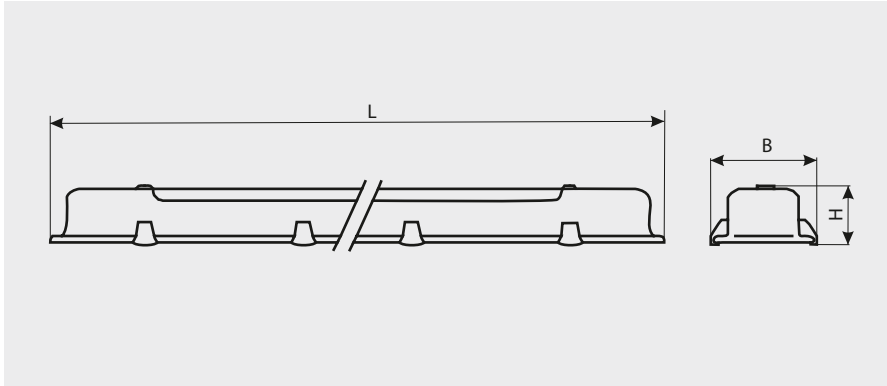

Светотехнические характеристики

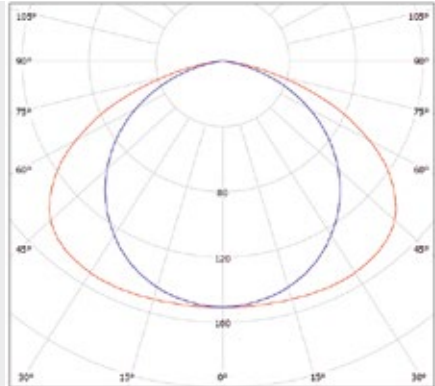

Кол-во и мощность источников света	Размеры, мм		
	L	B	H
2x18	690	195	80
2x36	1295	195	80
2x58	1595	195	80

Пример для заказа:
Аварийный светильник BS-9741-2x20 T8 LED - 10шт.