СБШв, ЦСБШв, СБлШв, ЦСБлШв, СБ2лШв, СБШнг(А), ЦСБШнг(А)

КАБЕЛИ СИЛОВЫЕ С ПРОПИТАННОЙ БУМАЖНОЙ ИЗОЛЯЦИЕЙ

POWER CABLES WITH PAPER-IMPREGNATED INSULATION

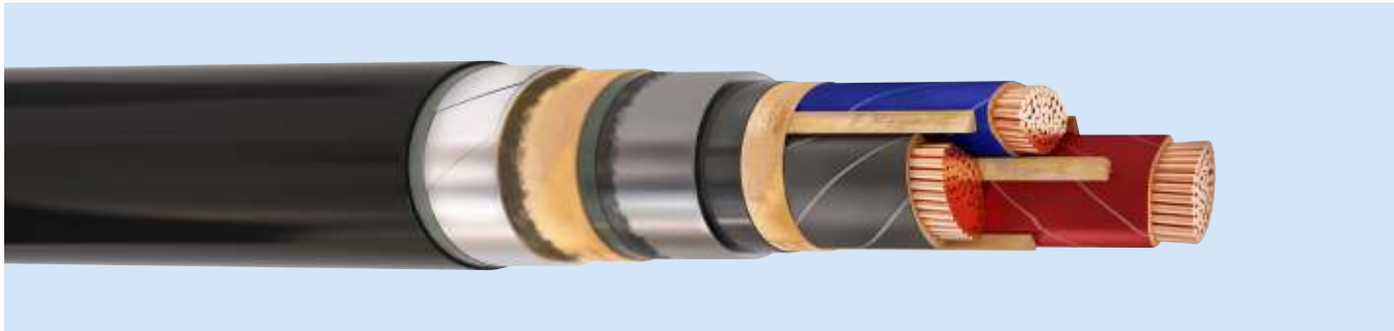

ОБЛАСТЬ ПРИМЕНЕНИЯ

Кабели предназначены для передачи и распределения электрической энергии в стационарных установках в электрических сетях на напряжение 1; 6; 10 кВ

КОНСТРУКЦИЯ

- **Жила -** медная многопроволочная или однопроволочная секторной или круглой формы
- **Изоляция -** бумага, пропитанная вязким составом, для кабелей с индексом “Ц” пропитанная нестекающим составом
- **Поясная изоляция -** бумага, пропитанная вязким составом, для кабелей с индексом “Ц” пропитанная нестекающим составом
- **Экран -** лента электропроводящей бумаги
- **Оболочка -** выпрессованная свинцовая оболочка
- **Защитный покров -** подушка из крепированной бумаги, пластмассовых лент для кабелей с индексами «л» и «2л», две стальные ленты и наружный покров из ПВХ пластиката, для кабелей с индексом «нг(А)» из ПВХ пластиката пониженной горючести

ТЕХНИЧЕСКИЕ ДАННЫЕ

Номинальное напряжение, кВ,	
для кабелей ЦСБШв, ЦСБлШв, ЦСБШнг(А)	6 или 10
для кабелей СБШв, СБлШв, СБ2лШв, СБШнг(А)	1; 6 или 10
Диапазон температур эксплуатации, °С	-50 до +50
Допустимый радиус изгиба при монтаже, диаметров кабеля	15

Кабели соответствуют требованиям ГОСТ 18410-73, ТУ К04.025-93

APPLICATION

The cables are designed for power transmission and distribution in stationary equipment in networks of 1; 6; 10 kV voltage

STRUCTURE

- **Conductor -** copper singlewire or multiwire sector or round shaped
- **Insulation -** paper impregnated with a viscous compound, for cables with index “Ц” with a non-draining compound
- **Belt insulation -** paper impregnated with a viscous compound, for cables with index “Ц” with a non-draining compound
- **Screen -** conducting paper tape
- **Sheath -** extruded lead
- **Protective cover -** crepe paper bedding, plastic tapes for cables with indices “л” and “2л”, two steel tapes and external PVC coating, for cables with index «нг(А)» - low smoke PVC plasicate

SPECIFICATIONS

Nominal voltage, kV,	
for cables types ЦСБШв, ЦСБлШв, ЦСБШнг(А)	6 or 10
for cables types СБШв, СБлШв, СБ2лШв, СБШнг(А)	1; 6 or 10
Operating temperature range, °C	-50 to + 50
Permissible bending radius for installation, cable diameters	15

The cables meet the requirements of national standard GOST 18410-73, Specs. K04.025-93