КАБЕЛИ СИЛОВЫЕ С ПРОПИТАННОЙ БУМАЖНОЙ ИЗОЛЯЦИЕЙ

POWER CABLES WITH PAPER-IMPREGNATED INSULATION

СП, ЦСП, СПл, ЦСПл, АСП, ЦАСП АСПл, ЦАСПл

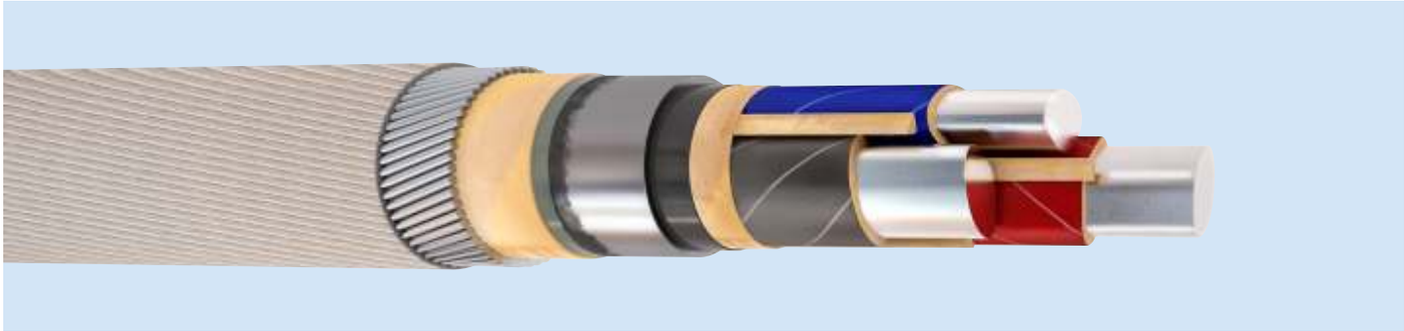

ОБЛАСТЬ ПРИМЕНЕНИЯ

Кабели предназначены для передачи и распределения электрической энергии в стационарных установках в электрических сетях на напряжение 1; 6; 10 кВ

КОНСТРУКЦИЯ

- **Жила -** алюминиевая или медная многопроволочная или однопроволочная секторной или круглой формы
- **Изоляция -** бумага, пропитанная вязким составом, для кабелей с индексом “Ц” пропитанная нестекающим составом
- **Поясная изоляция -** бумага, пропитанная вязким составом для кабелей с индексом “Ц” пропитанная нестекающим составом
- **Экран -** лента электропроводящей бумаги
- **Оболочка -** выпрессованная свинцовая оболочка
- **Защитный покров -** подушка из крепированной бумаги, пластмассовых лент для кабелей с индексом «л», бронепокровов из стальных оцинкованных проволок и наружный покров из стеклопряжи

ТЕХНИЧЕСКИЕ ДАННЫЕ

Номинальное напряжение, кВ,	
для кабелей марок ЦСП, ЦАСП, ЦСПл, ЦАСПл	6 или 10
для кабелей марок СП, АСП, СПл, АСПл	1; 6 или 10
Диапазон температур эксплуатации, °С	-50 до +50
Допустимый радиус изгиба при монтаже, диаметров кабеля	15

Кабели соответствуют требованиям ГОСТ 18410-73, ТУ К04.025-93

APPLICATION

The cables are designed for power transmission and distribution in stationary equipment in networks of 1; 6; 10 kV voltage

STRUCTURE

- **Conductor -** aluminium or copper singlewire or multiwire sector or round shaped
- **Insulation -** paper impregnated with a viscous compound, for cables with index “Ц” with a non-draining compound
- **Belt insulation -** paper impregnated with a viscous compound, for cables with index “Ц” with a non-draining compound
- **Screen -** conducting paper tape
- **Sheath -** extruded lead
- **Protective cover -** crepe paper bedding, plastic tapes for cables with indices «л», steel galvanized wires armour and external glass yarn coatin

SPECIFICATIONS

Nominal voltage, kV,	
for cables types ЦСП, ЦАСП, ЦСПл, ЦАСПл	6 or 10
for cables types СП, АСП, СПл, АСПл	1; 6 or 10
Operating temperature range, °C	-50 to + 50
Permissible bending radius for installation, cable diameters	15

The cables meet the requirements of national standard GOST 18410-73, Specs. К04.025-93