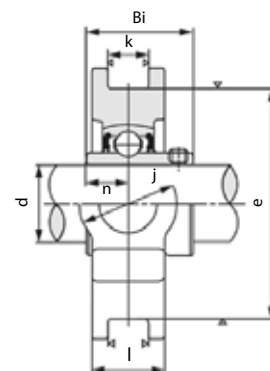
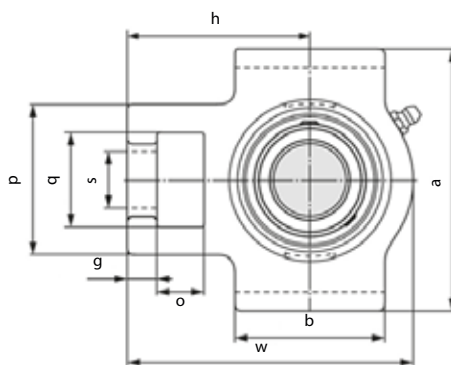


УСТ

Подшипниковый узел
натяжной

Артикул	Диаметр вала, d, мм	Допустимая динамическая нагрузка C (N)	Допустимая статическая нагрузка Co (N)	Размеры, мм															Вес, кг
				o	g	p	q	s	b	k	e	a	w	j	l	h	Bi	n	
UCT201	12	12160	6318	16	10	51	32	19	51	12	76	89	94	32	24	61	31	12,7	0,80
UCT202	15	12160	6318	16	10	51	32	19	51	12	76	89	94	32	24	61	31	12,7	0,79
UCT203	17	12160	6318	16	10	51	32	19	51	12	76	89	94	32	24	61	31	12,7	0,78
UCT204	20	12160	6318	16	10	51	32	19	51	12	76	89	94	32	24	61	31	12,7	0,76
UCT205	25	13300	7457	16	10	51	32	19	51	12	76	89	97	32	24	62	34,1	14,3	0,81
UCT206	30	18525	10735	16	10	56	37	22	57	12	89	102	113	37	28	70	38,1	15,9	1,22
UCT207	35	24415	14630	16	13	64	37	22	64	12	89	102	129	37	30	78	42,9	17,5	1,44
UCT208	40	27645	16910	19	16	83	49	29	83	16	102	114	144	49	35	89	49,2	19	2,40
UCT209	45	32395	20235	19	16	83	49	29	83	16	102	117	144	49	35	87	49,2	19	2,36
UCT210	50	33345	22135	19	16	83	49	29	86	16	102	117	149	49	35	90	51,6	19	2,43
UCT211	55	41230	27930	25	19	102	64	35	95	22	130	146	171	64	41	106	55,6	22,2	4,11
UCT212	60	49780	34390	32	19	102	64	35	102	22	130	146	194	64	46	119	65,1	25,4	4,97
UCT213	65	54340	38095	32	21	111	70	41	121	26	151	167	224	70	51	137	65,1	25,4	6,65
UCT214	70	59090	41895	32	21	111	70	41	121	26	151	167	224	70	46	137	74,6	30,2	7,05
UCT215	75	64030	45885	32	21	111	70	41	121	26	151	167	232	70	48	140	77,8	33,3	7,41
UCT216	80	69065	50350	32	21	111	70	41	121	26	165	184	235	70	51	140	82,6	33,3	8,30
UCT217	85	79800	58805	38	29	124	73	48	157	30	173	196	260	73	54	162	85,7	34,1	11,00
UCT218	90	91295	67925	41	31	132	81	48	151	30	189	216	280	80	55	137	96	39,7	12,75